


# TAURUS<sup>®</sup>

## LIGHT

*Color the stage!*

2023~2024 CATALOG

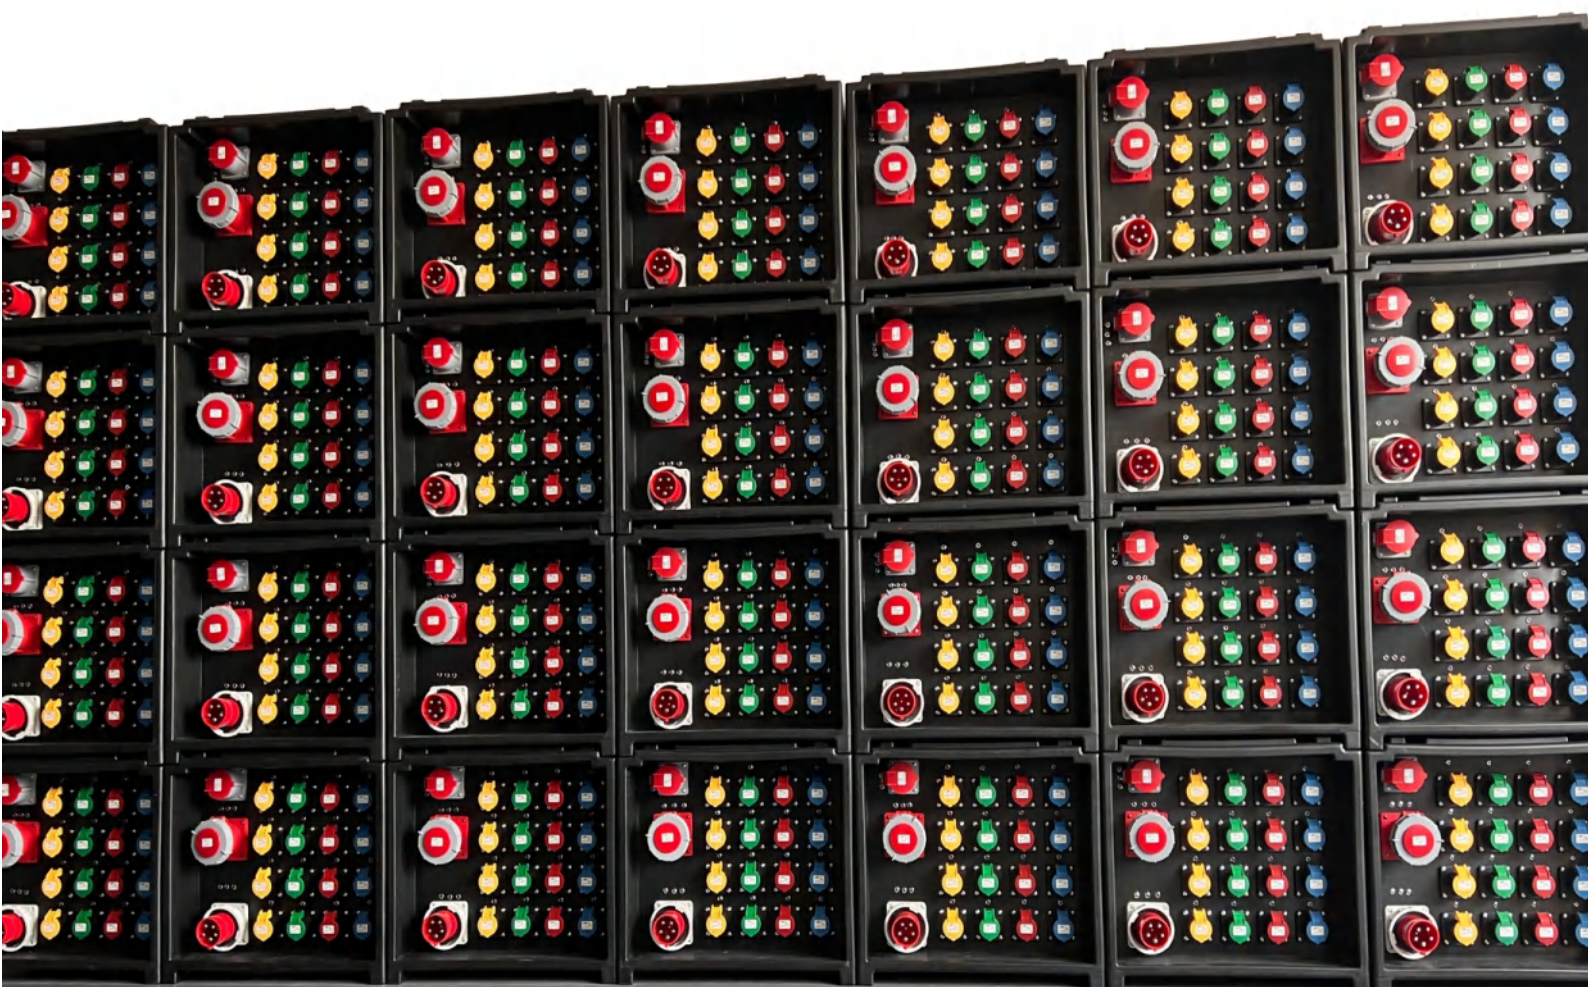

**TAURUS LIGHT CO., LIMITED**

广州特洛斯灯光设备有限公司



## About us

## Brief introduction for taurus light.

Taurus Light Co., Limited started from 2012, located at Huadu District, Guangzhou city of China, very close to Guangzhou International Airport.

Taurus Light is a professional stage lighting manufacturer, specialized in design and developed moving head, LED moving head, blinder lights, LED strobe, lighting power and control system and other stage lighting equipment, which sell to worldwide markets by our professional marketing team.

Taurus Light has the qualified engineers team and skilled workers, some which more than ten years experience. We have the complete QC system, all standard reliable quality and our products has obtained CE(EMC&LVD), ROHS certificates.

We are warmly welcome ODM&OEM. Let's "Make more for your stage"

### CERTIFICATES:



# EXHIBITION

# TAURUS<sup>®</sup> LIGHT



2021 GETSHOW GUANGZHOU



2019 GETSHOW GUANGZHOU



2019 PROLIGHT GUANGZHOU



2018 GETSHOW GUANGZHOU



2015 PALM EXPO INDIA




2018 PROLIGHT FRANKFURT



2015 PALM EXPO DUBAI

特洛斯灯光<sup>®</sup>  
www.tauruslight.com

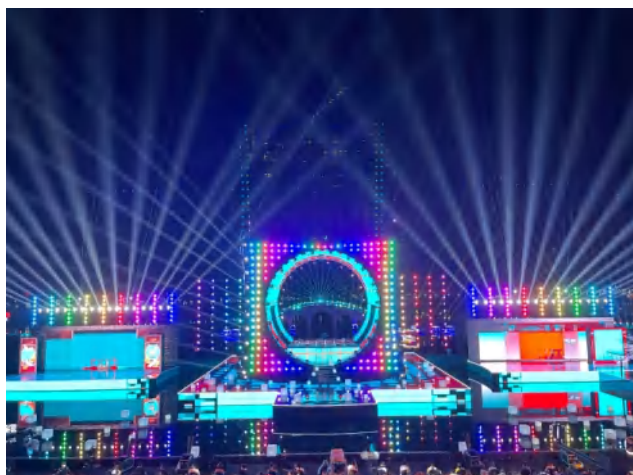

2021 CCTV七夕晚会



2020-2021湖南卫视跨年演唱会



2020-2021 B站跨年演唱会



2020金鹰电视艺术节





湖南卫视嗨唱转起来第二季



2021别克昂科威Plus上市发布会

# TAURUS<sup>®</sup> LIGHT



Ordercode: DIS8 IP

## IP DMX ISOLATED SPLITTER 日

### -8路防水信号放大器

#### SPECIFICATIONS AND FEATURES:

- 1 in 8 output DMX isolated splitter
- Each input/output full isolated
- Can use cable tie or clamps fix on truss
- XLR:3-pin 1IN/1THRU/8OUT Seetronic
- PowerCon Ture 1 input 1IN Seetronic
- LED indicator: Power, DMX
- Power input:90-250V AC, 47-63Hz
- IP rated: IP65
- Work temp: -30—70
- Fuse: T1A,250Vac
- Power: 10W
- Weight: 2.0KG
- Size: 225x147x83mm
- Standard: IEC/EN/UL62368

#### 规格和参数:

- 支持同时放大8路DMX数据
- 每个输入输出端口都采用全光电隔离
- 可以用魔术带或灯钩固定在桁架上
- 可以挂在墙上
- XLR接口: 3-pin 1IN/1THRU/8OUT (Seetronic)
- PowerCon Ture 1电源座: 1IN (Seetronic)
- 指示灯: Power、DMX
- 输入电压: 90-250V AC, 47-63Hz
- IP等级: IP65
- 工作环境温度: -30—70°C
- 保险规格: T1A,250Vac
- 功率: 10W
- 重量: 2.0Kg
- 产品尺寸: 225\*147\*83mm
- 符合IEC/EN/UL62368标准



特洛斯灯光<sup>®</sup>  
www.tauruslight.com

# TAURUS<sup>®</sup> LIGHT



Ordercode: AD8

## ARTNET CONTROLLER 8

### -8路Artnet控制器

#### SPECIFICATIONS AND FEATURES:


- Based on Artnet protocol network data communication
- Can set two different IP address in each controller.
- Set different network segments
- Manage Artnet on broadcast mode or unicast mode.
- Standard 1U(19" ) chassis architecture
- With LCD screen display
- Provides 8 standard DMX512 data output port
- Compatible with the light software
- Power Input: 120V/230V, 50/60Hz
- Size: 482x160x44mm
- Net weight: 2.35KG
- Power Consumption: 30W

#### 规格和参数:

- 机架式
- Art-Net™节点和光分路器
- 8个独立光输出口
- 多种供DMX输出的操作模式
- Powercon电源输入
- 输入电压: 90~220V, 50/60Hz
- Ethernet输入与输出
- 每路输出带指示灯
- 每路光电隔离
- Artnet信号转DMX信号
- 可以用常规灯光控制台MA, AVOLITES, 也可用于灯光软件如Madrix等
- 航空箱可选配
- 产品尺寸: 482x160x44mm
- 纸箱尺寸: 55X8.5X21.5cm
- 净重: 2.35KG
- 毛重: 2.9KG



特洛斯灯光<sup>®</sup>  
www.tauruslight.com

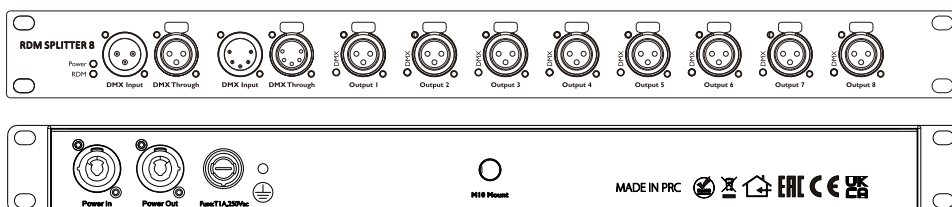

Ordercode: RS8

## rDM SPLITTER 8

### -8路RDM信号放大器


#### SPECIFICATIONS AND FEATURES:

- DMX hub / splitter : expand DMX networks
- All DMX/RDM inputs and outputs support RDM
- 1in 4out or 1in 8out
- Can be mounted in any 19" rack
- It has color LEDs to show the DMX signal status
- Optical isolation of inputs & outputs
- Additional thru output (3-pin and 5-pin)
- Electrical isolation between input and output
- AC power: Auto switching 100V - 240V 50/60Hz
- Dimensions: 483 x 134 x 46 mm (LxWxH)
- Weight: 2,1 kg

#### 规格和参数:

- DMX集线器/分配器: 扩展DMX网络
- 所有的DMX/RDM输入和输出都支持RDM。
- 1进4出或1进8出
- 适用于19英寸机架安装和桁架的安装
- 输入和输出都配备LED指示灯可显示信号状态
- 输入和输出的光隔离防止电干扰的传输及泄漏
- 附加3PIN/5PIN端口, 用于连接其他信号放大器设备
- 输入和输出隔离
- 电源: 100V - 240V 50/60Hz
- 尺寸: 483 x 134 x 46 mm (LxWxH)
- 净重: 2,1 kg





Ordercode: ST

# SOCAPEX TESTER

## -19芯测试器

### SPECIFICATIONS AND FEATURES:

- The ultimate tool for socapex 19pin cables
- With its versatile functions and user-friendly LCD screen
- Socapex female/male socket assembled
- Bolted to a work bench, easy for test
- Testing cable swap, short or open
- Powered by 4 x 1.5V AAA battery, long time use.
- External DC7-24V adaptor
- Automatically switching off while idle over 100 seconds
- Dimensions: 16x15x8cm
- Net Weight: 0.75KG

### 规格和参数:

- 19芯测试器
- LCD显示屏
- 内置4x5A电池
- 外置电源输入: DC5-18V,0.1A
- 自动关闭超过10秒
- 尺寸: 165x149x80mm
- 净重: 0.75KG







Ordercode: DIS8 PRO

## DMX ISOLATED SPLITTER 8

### -8路光电隔离信号放大器

#### SPECIFICATIONS AND FEATURES:

- Power input: AC120V-240V 50Hz/60Hz
- Dimensions: 482X170X44mm
- Weight: 2.6KG
- 1 in 8 / 2 in 4 out dmX splitter.
- Flightcase Weight:12.5 (2in1)
- Fully compliant to DMX-512 (1990)
- 3pin & 5pin DMX Input and DMX Thru
- 100% electrical isolation between in/output
- 100% electronic isolation between output/output
- Signal & power LED indicator for each output
- Terminator resistor switch for end of a DMX chain
- Powercon in/output connectors

#### 规格和参数:

- 1路输入，8路输出或者2路输出，4路输出
- 三芯卡侬头插座
- 各输出接口之间的电气隔离,电压: >2000V
- DMX 信号分配及放大
- 输入输出完全电气隔离
- 配置设备终端电阻开关
- 针信号卡侬座
- 设置电源及信号指示灯
- Powercon电源输入
- 工作电压: AC 120V 60Hz / AC 240V 50Hz
- 尺寸: 1U 19", 482x170x44mm
- 重量: 2.6Kg



# TAURUS<sup>®</sup> LIGHT



Black Color



Red Color



Blue Color

Ordercode: DIS8

## DMX ISOLATED SPLITTER 8

### -8路光电隔离信号放大器

#### SPECIFICATIONS AND FEATURES:

- Power input: AC120V-240V 50Hz/60Hz
- Dimensions: 482X170X44mm
- Weight: 2.6KG
- Flightcase Size: 53x40x20cm (2in1)
- Flightcase Weight:12.5 (2in1)
- Fully compliant to DMX-512 (1990)
- 3pin & 5pin DMX Input and DMX Thru
- 100% electrical isolation between in/output
- 100% electronic isolation between output/output
- Signal & power LED indicator for each output
- Terminator resistor switch for end of a DMX chain
- Power input via Powercon connector on rear panel

#### 规格和参数:

- 1路输入，8路输出
- 三芯卡侬头插座
- 各输出接口之间的电气隔离,电压: >2000V
- DMX 信号分配及放大
- 输入输出完全电气隔离
- 配置设备终端电阻开关
- 针信号卡侬座
- 设置电源及信号指示灯
- Powercon电源输入
- 工作电压: AC 120V 60Hz / AC 240V 50Hz
- 尺寸: 1U 19", 482x170x44mm
- 重量: 2.6Kg



特洛斯灯光<sup>®</sup>  
www.tauruslight.com

## rDM Touch Tester

-RDM测试器



Ordercode: RTT

### SPECIFICATIONS AND FEATURES:

- The ultimate tool for all lighting technicians
- With its versatile functions and user-friendly colour TFT touch screen with six buttons, the RDM Touch is perfectly equipped to measure, test and troubleshoot all setups with DMX-controlled lighting
- Can be used to test 3- and 5-pole cables and MIDI signals, monitor and analyse signals, program sequences and send and receive DMX signals, and is also equipped with an RDM controller function
- The ultimate solution to most known problems related to DMX-512
- Functions: DMX and RJ45 cable testing, MIDI testing, channel tracer, timing analysis, DMX flicker search function, LED PWM rate measurement, programmable sequence record/playback, DMX send/receive, Artnet testing and send/receive via Artnet.
- Memory: MicroSD card
- DMX input/output: 5-pin XLR
- USB port: Micro USB, type B
- USB power consumption: max. 300 mA
- Power supply via 9 V battery (battery not included)
- Dimensions: 66.5 x 115 x 44.5 mm
- Weight: 345 g
- Includes case and XLR adapters for 3- and 5-pin connectors

### 规格和参数:

- 全彩TFT显示屏, 分辨率240x320像素
- 8GB SD卡
- DMX 5芯公插输入 (可转换为3芯)
- DMX 5芯母插输出 (可转换为3芯)
- DMX接口电气标准: ANSI E1.11 / ANSI E1.20
- RJ45 接口支持TCP/IP, 使用 静态IP分配
- USB接口: Micro USB B类型
- 电池: 9V电池 (产品不含)
- USB功率: 最大300mA
- 电缆测试: 3/5芯, 开路, 短路, 线路接错
- 接收512个DMX信号通道, 发射512个信号通道
- 刷新率: 10, 15, 20, 25, 30, 35, 40帧 每秒
- 发射中断时长: 160-180微秒 (不可配置)
- 发射MAB时长: 28-32微秒 (不可配置)
- 时序检测: 帧率 / Break / MAB
- 显示格式: 百分比, 十进制, 十六进制
- DMX场景储存: SD卡, 每个场景512通道
- 保存程序数量: 取决于SD卡的容量
- 单个程序最大步数: 99

## cable Tester

-测线器



Ordercode: CT

### SPECIFICATIONS AND FEATURES:

- Battery Powered (Included)
- 5PIN XLR
- 3PIN XLR
- RCA
- 3&5&8PIN DIN
- Speakon -4P
- 4 pin S type Jack
- Ethernet connectors
- USB
- Jack 6.3mm
- Speakon-8P
- Powercon connectors
- Powercon True1 connectors
- Phone
- Weight: 1.5KG
- Size: 25x12.8x6cm

### 规格和参数:

- 含有电池
- 3针XLR
- 5针XLR
- RCA
- 3&5&8PIN DIN
- Speakon -4P
- 4 pin S type Jack
- Ethernet connectors
- USB
- Jack 6.3mm
- Speakon-8P
- Powercon connectors
- 防水Powercon
- Phone
- 重量: 1.5KG
- 尺寸: 25x12.8x6cm

## rDM&DMX Splitter 6

-6路RDM信号放大器



Ordercode: RS6

### SPECIFICATIONS AND FEATURES:

- Power input: AC120V or 240V 50Hz/60Hz
- Dimensions: 482x145x44mm
- Weight: 1.75KG
- 6x3pin&5pin DMX out
- Flightcase Weight: 12.5 (2in1)
- Fully compliant to DMX-512 (1990)
- 3pin & 5pin DMX Input and DMX Thru
- 100% electrical isolation between in/output
- 100% electronic isolation between output/output
- Signal & power LED indicator
- 6 Channel output
- Use for RDM equipments

### 规格和参数:

- 机架式
- 3针和5针DMX输出
- 6路输出
- Powercon电源输入
- 输入电压: 220V, 50/60Hz
- 每路输出带指示灯
- 每路光电隔离
- 用于RDM灯具设备
- 航空箱可选配
- 产品尺寸: 482x145x44mm
- 重量: 1.75KG



## 4 IN 4 OUT DMX SPLITTER -4进4出信号放大器



Ordercode: DIS4I

### SPECIFICATIONS AND FEATURES:

- Power input: AC120V or 240V 50Hz/60Hz
- Dimensions: 482X170X44mm
- Weight: 2.55KG
- Flightcase Size: 53x40x20cm (2in1)
- Flightcase Weight:12.5 (2in1)
- Fully compliant to DMX-512 (1990)
- 4 DMX Input
- 4 DMX Output
- 100% electrical isolation between in/output
- 100% electronic isolation between output/output
- Signal & power LED indicator for each output
- Terminator resistor switch for end of a DMX chain
- Power input via Powercon connector on rear panel

### 规格和参数:

- 4路DMX输入
- 4路DMX输出
- 三芯卡侏头插座
- 各输出接口之间的电气隔离,电压: >2000V
- DMX 信号分配及放大
- 输入输出完全电气隔离
- 配置设备终端电阻开关
- 设置电源及信号指示灯
- Powercon电源输入
- 工作电压: AC 120V 60Hz / AC 240V 50Hz
- 尺寸: 1U 19", 482x170x44mm
- 重量: 2.55Kg

## DMX ISOLATED SPLITTER 4

### -4路光电隔离信号放大器



Ordercode: DIS4

### SPECIFICATIONS AND FEATURES:

- Power input: AC120V-240V 50Hz/60Hz
- Dimensions: 482X135X44mm
- Weight: 1.9KG
- Flightcase Size: 53x40x20cm (2in1)
- Flightcase Weight:12.5 (2in1)
- Fully compliant to DMX-512 (1990)
- 3pin & 5pin DMX Input and DMX Thru
- 100% electrical isolation between in/output
- Signal & power LED indicator for each output
- Terminator resistor switch for end of a DMX chain
- Power input via Powercon connector on rear panel

### 规格和参数:

- 1路输入, 4路输出
- 三芯卡侏头插座
- 各输出接口之间的电气隔离,电压: >2000V
- DMX 信号分配及放大
- 输入输出完全电气隔离
- 配置设备终端电阻开关
- 针信号卡侏座
- 设置电源及信号指示灯
- 设置2个5V2A USB充电器口
- Powercon电源输入
- 工作电压: AC 120V 60Hz / AC 240V 50Hz
- 尺寸: 1U 19", 482x135x44mm
- 重量: 1.9Kg

## DMX ISOLATED SPLITTER 6

### -6路光电隔离信号放大器



Ordercode: DIS6

### SPECIFICATIONS AND FEATURES:

- "DMX in" and "DMX loop out"
- High brightness power and data LED's
- 1 DMX in, 6 DMX output
- Internal circuit board carries spare IC's
- DMX 3pin connector in/out (5P optional)
- With safety Chain
- With cable tie easy to put on truss
- Powercon power input
- Power input: 220V (110V optional)
- Size: 67 x 35 x 85CM
- Gross Weight: 1.6KG

### 规格和参数:

- 1路输入, 6路输出
- 三芯卡侏头插座
- 各输出接口之间的电气隔离,电压: >2000V
- DMX 信号分配及放大
- 输入输出完全电气隔离
- 配置设备终端电阻开关
- 针信号卡侏座
- 设置电源及信号指示灯
- Powercon电源输入
- 工作电压: AC 120V 60Hz / AC 240V 50Hz
- 尺寸: 67X35X85CM
- 重量: 1.6Kg



## rdm art net 8



Ordercode: RA8

### SPECIFICATIONS AND FEATURES:

- Rack mountable
- Both an ethernet node and an optical splitter
- Variable operating modes for all DMX outputs
- Two Neutrik® etherCON® in/through ports
- Backup settings and configurations
- With LCD screen display
- Webserver supported for remote configuration and backup/update
- Merge two controllers via DMX, Art-Net™, or sACN
- Record function allows you to record looks from a controller and save them into memory
- Power Input: 120V/230V, 50/60Hz
- Size: 483x168x45mm
- Net weight: 2.5KG

## POE NETWORK SWITCH 4



Ordercode: PNS4

### SPECIFICATIONS AND FEATURES:

- Total output consumption: 240W (each port 30W)
- Transfer Rate: 10/100/1000Mbps
- Universal power supply 100-240V
- Port Description: 5x gigabit Ethercon ports(4x with Poe)
- Network standards: IEEE802.3, IEEE802.3u IEEE802.3x
- Poe standards: IEEE802.3AF/AT
- QOS: not supported
- Network Management: YES
- Status Indicators: Power, Poe/Mode/Fault, Link / Activity Indicator
- OLED display, four rubber buttons
- Each port can be manually setted power supply function
- Non-blocking layer 2 Ethernet switching architecture
- Auto-MDI/MDIX eliminates the need for crossover cables
- Supports MAC address auto-learning and auto-aging
- Auto-negotiation ports provide smart integration between 10Mbps, 100Mbps, 1000Mbps hardware
- no broadcast bandwidth limitation
- Automatically detect and recognize the powered devices (PD)
- With smart consumption managements, to avoid overload work and maintain the safety & lifetime
- Desktop or wall-mounting design, 1U rack size
- Plug and Play design simplifies installation
- Weight: 2.4kg



## STAGE PLAYER 1024

### -Wifi控制盒



Ordercode: SP1024

#### SPECIFICATIONS AND FEATURES:

- Supports ArtNet and DMX
- 1024 channels DMX in & out
- Real-time record and replay via DMX or WiFi
- 8 Memories and each up to 20 hours can be stored in SD card
- Replay can run in solo or loop mode
- Replay can run on iPad/iPhone via TouchOSC
- DMX signal booster
- DMX input to Artnet output via wifi or Lan cable
- Artnet input to Artnet output via wifi
- Artnet input via wifi to Artnet output via Lan cable
- Artnet input via Lan cable to 2 DMX outputs
- Artnet input via wifi to 2 DMX outputs
- DMX Merger
- 24 channels simple console
- Power consumption: 6W max.
- Power In: AC 100-240V 50-60Hz
- Dimension: 225x130x55 mm
- Weight: 0.70 kg

#### 规格和参数:

- 支持ARTNET和DMX
- 1024通道输出
- 8个场景, 每个可存储20个小时通过SD卡
- 可以通道TouchOSC控制
- DMX信号放大功能
- 可以ARTNET转DMX和其它多种转换
- 可以做为一个简单控台使用
- 功率: 6W
- 输入: AC100~240V, 50/60Hz
- 尺寸: 225x130x55mm
- 重量: 0.7KG

## DMX RECORDER 4

### -录播器



Ordercode: DR4

#### SPECIFICATIONS AND FEATURES:

- Control Mode : Auto, DMX, Manual, Timer
- DMX Channels : 512
- Universes : 1
- Power Supply : 100-240 VAC 50-60 Hz
- Power Consumption : 3450 W
- OLED display with navigation knob
- can be mounted in any 19" rack
- four optically isolated output ports with 3pin/5pin
- It has color LEDs to show the DMX signal status of each output and input.
- SD card inside can record DMX show
- four powercon connector
- show can be triggered by DMX, RTC clock
- Terminated resistance
- AC power: Auto switching 100V - 240V 50/60Hz
- Dimensions: 483x181x44.5mm(LXWXH)
- Weight: 2.4KG

#### 规格和参数:

- OLED 显示屏和时尚的导航按键
- 适用于19英寸机架安装
- 4路输出端口光隔离, 可选择3P或者5P
- 输入和输出都配备LED指示灯可显示信号状态
- 内置SD卡
- 4个powercon 连接头
- 场景可通过 DMX, RTC clock 触发
- 终端电阻
- 电源: 100V - 240V 50/60Hz
- 尺寸: 83X145X44.5mm(LXWXH)
- 净重: 2,4 kg

## DMX MIRROR-BALL MOTOR

### -DMX水晶球马达



Ordercode: DMM40

#### SPECIFICATIONS AND FEATURES:

- For rotating mirror balls up to Ø 100 cm and max. 40 kg (incl. fastening material, e.g. chain, safety, etc.)
- It can be controlled in automatic mode and DMX mode
- The direction of rotation and the rotational speed can be adjusted in both modes
- Revolution speed from 0.5 r/min to 5 r/min
- All functions can be set via LED display
- The motor has a double protection through a transverse axis, which must always be used during operation
- Relay allows for controlling luminaires with electronic transformers
- Power supply: 230 V AC 50 Hz
- Power consumption: 16 W
- Max. load capacity: 40 kg (incl. chain, safety, etc.)
- Dimensions (L x W x H): 285 x 235 x 190 mm
- Weight: 6.0 kg

#### 规格和参数:

- 最长100CM
- 最高负重40KG (包括所有配件)
- 可以通过DMX控制或者自走
- 可以调节速度
- 功率: 16W
- 尺寸: 285x235x190cm
- 重量: 6KG.
- DMX地址码可调;
- 可接收DMX512数字信号 (3PIN卡依座)
- 信号输入: DMX-512信号; (3PIN卡依座/5针卡依座)
- 供电: AC220V±10%, 45-60Hz



# TAURUS<sup>®</sup> LIGHT

## DMX PROCESSING UNIT

### -4路扩展盒



Ordercode: DPU4

#### SPECIFICATIONS AND FEATURES:

- All alloy aluminum plate CNC technology and high laser metal cutting technology
- Anodizing surface treatment and drawing technology
- Portable product size: 170\*150\*30mm
- N.W.: 0.6KG
- Core components PCB full board immersion Golden Process
- Industrial parts, strict selection to ensure the best stability
- Fine assembly process, uninterrupted 24 hours ageing test
- More than 2 hours of uninterrupted simulate shake test
- Voltage DC5V .Power 2.5W (USB interface power supply, eliminate external power supply)
- 1 USB2.0( mini A type)
- 4 DMX-512 Output

#### 规格和参数:

- 高档一体铝材外壳
- 尺寸: 170x150x30mm
- 重量: 0.6KG
- 输入: DC5V, USB供电
- 功率: 2.5W
- 高速处理CPU
- 1个USB 2.0输入
- 4个DMX512 3针输出口
- 无需额外设置, 快速识别MA onPC软件
- 非常适用小型活动, 及学习, 编程序使用。

## WIRELESS CONTROLLER

### -无线发射接收器



Ordercode: WC-S/R

#### SPECIFICATIONS AND FEATURES:

- Power 6W
- Wireless 2.4G
- The transmitting range 300 meters
- Add the signal-amplifier to be possible to transmit 1KM
- Easy installation with hanger
- Channel spacing: 5MHz
- Interface rate: 250000bp / s
- Interface data format: DMX512
- Equipped the W-DMX antenna from Sweden
- Germany technology for mainboard
- Power Supply: 110~220V,50/60Hz
- Size: 15x12x6cm
- Carton Size: 31x22x9cm
- N.W Weight: 1KG
- Gross Weight: 1.5KG

#### 规格和参数:

- 无线2.4G
- 传送距离300米
- 瑞典无线技术 W-DMX
- 一个发射可以带任意接收
- 增加信号放大器最多可以传输1公里
- 功率: 6W
- 电源: 110~220V,50Hz~60Hz
- 尺寸: 15x12x6cm
- 净重: 1KG

## ARTNET CONTROLLER

### -2路双向Artnet控制器



Ordercode: AD2

#### SPECIFICATIONS AND FEATURES:

- DMX:2x shielded&gold plated 3-pin XLR(female)
- Network:1\*10/100 Mbps RJ45 connector
- Power supply:9-12V DC
- Support Agreement:DMX512,RDM(selected)ANSI E1.20
- DMX port direction:input or output(configurable)
- DMX port protection:built-in 1.5kv
- DMX Port Match/Offset:yes
- DMX Parameters:Frame Frequency:10-40fps/Break:176-352μs
- Support agreement:Art-Net,UDP,TCP,ICMP,DHCP
- Port rate:10/100Base TX
- Port detection:auto-negotiation,MDI/MDIX
- Configuration management software:search found
- WEB configuration:support
- Ethernet port indication:connection and activity
- Run:LED indication
- Weight:260g
- Size: 11\*9\*5cm

#### 规格和参数:

- ArtNet转换到DMX
- DMX转换到ArtNet
- 遵循ArtNet/ArtNetII协议
- 标准的DMX512信号输出
- 提供配置工具, 方便用户配置参数
- 具有网络, 串口收发指示
- 支持第三方软件, 如Sulite,Arkaos,等
- 标准的RJ45网络接口
- 输入电压5V DC,500mA
- 10/100M网络接口, 1.5KV网络隔离变压器
- 网络数据收发指示
- DMX数据收发指示



特洛斯灯光<sup>®</sup>  
www.tauruslight.com



Ordercode: RDB-M



Ordercode: RDB-F

## RJ45 to DMX Split Box

-RJ45转DMX盒子

### SPECIFICATIONS AND FEATURES:

- RJ45 DMX Split Box female/male.
- RJ45 socket to 4x DMX XLR 3-pin female sockets
- Colour: black
- Cable splitter for DMX via CAT cable applications.
- RJ45 socket to 4x DMX XLR 3-pin male socket
- Size: 15x8x4cm
- Weight: 0.25kg
- IP Rated: IP20

### 规格和参数:

- RJ45转4个DMX座输出
- 3针和5针可选
- 分为公座或者母座XLR
- 尺寸: 15X8X4cm
- 重量: 0.25KG
- 防水等级: IP20



Ordercode: RSB-M (F)

## RJ45 DMX Split Box

-RJ45转DMX盒子

### SPECIFICATIONS AND FEATURES:

- RJ45 DMX Split Box female/male.
- RJ45 socket to 4x DMX XLR 3-pin female sockets
- Colour: black
- Cable splitter for DMX via CAT cable applications.
- Equipped with 110 ohm DMX cables
- Size: 20x14x4cm
- Weight: 0.4kg
- IP Rated: IP20

### 规格和参数:

- RJ45转4个DMX座输出
- 3针和5针可选
- 分为公座或者母座XLR
- 线的长度为0.5M, 其它可定制
- 尺寸: 20x14x4cm
- 重量: 0.4KG
- 防水等级: IP20





# TAURUS<sup>®</sup> LIGHT



Ordercode: DSP6

## dmx switch pack 6

### -DMX关开盒

#### SPECIFICATIONS AND FEATURES:

- Unit size: 46x10x7.5 mm
- Unit weight: 3kgs
- 6 controllable channels
- LED indicator per channel
- 5 A load per channel
- Maximum current 16 A
- Outputs via 6 safety sockets
- DMX512 input and output
- DMX starting address adjustable via DIP switches
- For truss installation and wall installation
- Control: Stand-alone; DMX
- Max. power output: 3000 W
- Relay allows for controlling luminaires with electronic transformers

#### 规格和参数:

- 本控制器为一个6通道输出。
- 液晶显示: 大屏幕绿色背光液晶显示, 人性化操作界面。
- 每路输出带指示灯
- 最大负载3000W。
- 输出插座可选: Powercon, 美式, 英式, Powercon防水座, 万用座
- Powercon输入输出, 也可用线带插头输入。
- DMX地址码可调;
- 可接收DMX512数字信号 (3PIN卡依座)
- 信号输入: DMX-512信号; (3PIN卡依座/5针卡依座)
- 输出功率: 每路最大2000W
- 供电: AC220V±10%.45-60Hz
- 纸箱尺寸: 46x10x7.5cm
- 重量(kg): 3kg



特洛斯灯光<sup>®</sup>  
www.tauruslight.com

# TAURUS<sup>®</sup> LIGHT



## 6ch dmx console

Ordercode: 6DC



## 12ch dmx console

Ordercode: 12DC



## 24ch dmx console

Ordercode: 24DC



## 48ch dmx console

Ordercode: 48DC



## 192ch dmx console

Ordercode: 192DC



## 6ch dmx dimmer pack

Ordercode: D-6CHP



特洛斯灯光<sup>®</sup>  
[www.tauruslight.com](http://www.tauruslight.com)

## 1 Channel digital dimmer pack

### -1路数字硅箱



Ordercode: D1CH

#### SPECIFICATIONS AND FEATURES:

- Unit size: 120 X 110 X 160 mm
- Unit weight: 1.7kg
- Voltage: AC 110-120V/60Hz, AC 220-240V/ 50Hz
- With high speed CPU memory do the mathematic operation .
- LCD display.
- DMX addresss can be set between 001-512.
- With memory function .
- 3 pin male XLR socket for DMX input .
- Two control curves are available: SWITCH,LINER
- Each channel independent and has linear dimming from 0-100%,with memory function
- Power failure protection, phase correction , DMX signal parallel , use it alone
- Rating current for every channel 10A-20A ,250V 5X20MM

#### 规格和参数:

- 本控制器为一个1通道调光后级,即可独自使用,也可作为DMX后级用。
- 液晶显示:大屏幕绿色背光液晶显示,人性化操作界面。
- 其调光具有三种特性可选: SWITCH (开关型)、LINEAR (线性调光型)、SQUARE (曲线调光型);
- 另外还具有预热、掉电保护,DMX信号控制联机等功能。
- 1通道数字调光硅箱,各通道采用模块式独立运作
- 调光范围: 0%-100%; 调光精度255级;
- 各通道的从0-100%的线性调光.额定工作电流10/20, 二种规格可选;
- 可接收DMX512数字信号 (3PIN卡依座)
- 负载智能检测: 自动检测负载, 超负荷及短路保护;
- 信号输入: DMX-512信号; (3PIN卡依座/8针莲花座)
- 掉电记忆功能: 掉电后重新加电可保持掉电前模式;
- 输出功率: 每路3000KW
- 供电: AC220V±10%.45-60Hz
- 体积(mm): 120x110x160mm
- 重量(kg): 1.7kg

## 2 Channel digital dimmer pack

### -2路数字硅箱



Ordercode: D2CH

#### SPECIFICATIONS AND FEATURES:

- Carton size: 31x23x35 cm(2in1)
- Unit weight: 1.8KG
- Voltage: AC 110-120V/60Hz, AC 220-240V/ 50Hz
- LCD display.
- DMX addresss can be set between 001-512.
- With memory function .
- 3 pin male XLR socket for DMX input .
- Two control curves are available: SWITCH,LINER
- Each channel independent and has linear dimming from 0-100%,with memory function
- Power failure protection, phase correction , DMX signal parallel , use it alone
- Rating current for every channel 10A-20A ,250V 5X20MM

#### 规格和参数:

- 本控制器为一个2通道调光后级,即可独自使用,也可作为DMX后级用。
- 液晶显示:大屏幕绿色背光液晶显示,人性化操作界面。
- 其调光具有三种特性可选: SWITCH (开关型)、LINEAR (线性调光型)、SQUARE (曲线调光型);
- 另外还具有预热、掉电保护,DMX信号控制联机等功能。
- 2通道数字调光硅箱,各通道采用模块式独立运作
- 调光范围: 0%-100%; 调光精度255级;
- 各通道的从0-100%的线性调光.额定工作电流10/20, 二种规格可选;
- 可接收DMX512数字信号 (3PIN卡依座)
- 负载智能检测: 自动检测负载, 超负荷及短路保护;
- 信号输入: DMX-512信号; (3PIN卡依座/8针莲花座)
- 掉电记忆功能: 掉电后重新加电可保持掉电前模式;
- 输出功率: 每路3000KW
- 供电: AC220V±10%.45-60Hz
- 纸箱尺寸: 31x23x35cm
- 重量(kg): 1.8kg

## 4 Channel digital dimmer pack

### -4路数字硅箱



Ordercode: D4CH


#### SPECIFICATIONS AND FEATURES:

- Unit size: 260 x 190 x 75 mm
- Unit weight: 2.7kg
- Voltage: AC 110-120V/60Hz, AC 220-240V/ 50Hz
- 4DMX channels
- 6.3A/channel, Max.16A totally
- Max Power: 3000W,
- Each channel Max power: 1000W
- 4 outlets
- Stand-alone chasing function
- Output socket can customized
- Output: CEE 16A, Edison, Schuko socket etc.

#### 规格和参数:

- 本控制器为一个4通道调光后级,即可独自使用,也可作为DMX后级用。
- 液晶显示:大屏幕绿色背光液晶显示,人性化操作界面。
- 其调光具有三种特性可选: SWITCH (开关型)、LINEAR (线性调光型)、SQUARE (曲线调光型);
- 另外还具有预热、掉电保护,DMX信号控制联机等功能。
- 4通道数字调光硅箱,各通道采用模块式独立运作
- 调光范围: 0%-100%; 调光精度255级;
- 各通道的从0-100%的线性调光.额定工作电流10/20, 二种规格可选;
- 可接收DMX512数字信号 (3PIN卡依座)
- 负载智能检测: 自动检测负载, 超负荷及短路保护;
- 信号输入: DMX-512信号; (3PIN卡依座/8针莲花座)
- 掉电记忆功能: 掉电后重新加电可保持掉电前模式;
- 输出功率: 每路1000KW
- 供电: AC220V±10%.45-60Hz
- 尺寸: 26x19x75cm
- 重量(kg): 2.7kg



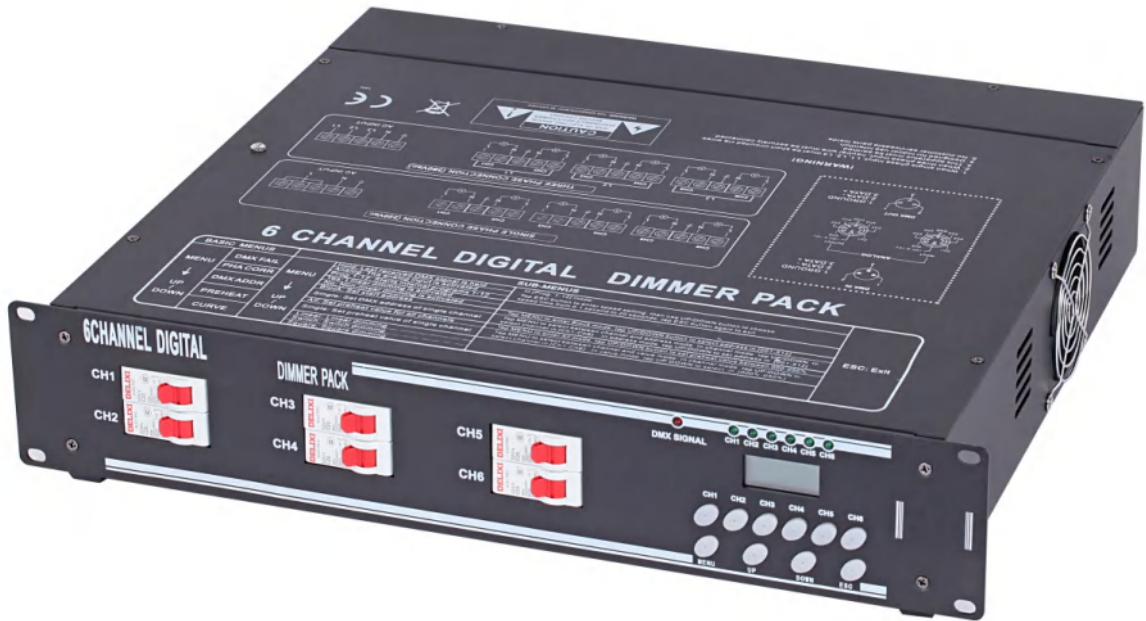

Ordercode: D6CH

## 6 Channel digital dimmer pack -6路数字硅箱

### SPECIFICATIONS AND FEATURES:

- Unit size: 482 x 400 x 90 mm
- Unit weight: 8.5kgs
- Voltage: AC 110-120V/60Hz, AC 220-240V/ 50Hz
- 6 channel DMX digital dimmer pack
- Digital LCD display, DMX input
- Three phase input: 10A per channel, total 20A per phase
- Microcomputer control
- Separate DMX addressing for each channel
- Built-in 12 chase programs, chase speed adjustable
- Chase programs 1-12, DMX Hold, Analog can be selectable
- Phase correction activates linear dimming 0-100%
- Control curve selectable from Linear / Switch / Square
- Analog input works without any adjustment
- Electronic protection against overheating and short circuits
- Carton Size: 53x48x19cm
- G.W: 10kg

### 规格和参数:

- 本控制器为一个6通道调光后极，即可独自使用，也可作为DMX后极用。
- 液晶显示：大屏幕绿色背光液晶显示，人性化操作界面。
- 其调光具有三种特性可选；SWITCH（开关型）、LINEAR（线性调光型）、SQUARE（曲线调光型）；
- 另外还具有预热、掉电保护，相位补偿，DMX信号控制联机等功能。
- 6通道数字调光硅箱，各通道采用模块式独立运作
- 调光范围：0%-100%；调光精度255级；
- 各通道的从0-100%的线性调光,额定工作电流10/20/30A，三种规格可选；
- 可选择单相或三相输入；
- 高品质铸铝风机：降低工作噪音，延长设备寿命；防尘网罩；
- 可接收DMX512数字信号（3PIN卡侬座）或模拟信号DC 0-10V（15PIN D型插座）
- 负载智能检测：自动检测负载，超负荷及短路保护；
- 信号输入：DMX-512信号；（3PIN卡侬座/8针莲花座）
- 掉电记忆功能：掉电后重新加电可保持掉电前模式；
- 输出功率：每路3000KW
- 供电：三相四线制AC380V±10%.AC220V±10%.45-60Hz
- 体积(mm)：482 x 400 x 90 (2U)
- 重量(kg)：8.5kg





Ordercode: D12CH

## 12 Channel digital dimmer pack

### - 12路数字硅箱

#### SPECIFICATIONS AND FEATURES:

- Unit size: 482 X 381 X 174 mm(4U)
- Unit weight: 20kgs
- Voltage: AC 110-120V/60Hz, AC 220-240V/ 50Hz
- Digital LCD display, DMX input
- Different kinds of rear panel for choose (Edison, CEE, 19pin...)
- Max. current/channel: 10A or 20A for options
- Microcomputer control
- Separate DMX addressing for each channel
- Built-in 12 programs, speed adjustable
- Phase correction activates linear dimming (0-100%)
- Control curve selectable from switch to linear
- Electronic protection against overheating and short circuits
- Power failure memory
- With brackets for easier handling and using
- Carton Size: 62x54x29cm G.W: 22.5kg

#### 规格和参数:

- 本控制器为一个12通道调光后极，即可独自使用，也可作为DMX后极用。
- 液晶显示：大屏幕绿色背光16位液晶显示，人性化操作界面。
- 组合式负载控制模块：每个通道都是独立的抽插盒设计，可随意抽插；
- 相位自动跟踪补偿：相间输入电压差变化时，自动调节输出
- 缺相保护功能：当三相电缺相时，本机自动停止工作
- 高品质环形抗干扰扼流圈；
- 调光范围：0%-100%；调光精度255级；
- 调光曲线：预置线性、开关型二种调光特性供客户选择；
- 独立调光：每路可独立设置亮度值；整体调光：可每12路同时设置亮度值；
- 高品质铸铝风机：降低工作噪音，延长设备寿命；防尘网罩；
- 预热值设置：0%-50%预热值任意设置，延长后极灯泡寿命；
- 负载智能检测：自动检测负载，超负荷及短路保护；
- 信号输入：DMX-512信号；（3PIN卡依座/8针莲花座）
- 手动测试功能：可0-100%亮度作全回路（功能）循环测试；
- 最高输出电压：每回路可设定最高输出电压值(即可限制每回路最高输出)
- 内置程序：12个内置程序，程序运行速度可调；
- 掉电记忆功能：掉电后重新加电可保持掉电前模式；
- 输出功率：每路4.5KW
- 供电：三相四线制AC380V±10%.AC220V±10%.45-60Hz
- 体积(mm)：482 X 381 X 174 (4U)
- 重量：20KG





Ordercode: TPB211

## CEE WATERPROOF POWER BOX

### -12路防水CEE电源箱

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 63A 380V~
- Size: 54x42x42cm
- 12x16A CEE 3pin Output
- 2x Multi-socket output
- Each output has LED indicator lights
- Multi-function power meter
- IP Rated: IP44
- Ip67 Cover to protect the breaker
- Moveable Wheel (Optional)
- Carton Size: 58x48x46cm
- Weight: 23.5KG

#### 规格和参数:

- 电源输入: 5P 63A, 380V~
- 尺寸: 54x42x42cm
- 12x16A防水CEE3针输出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 防水等级: IP44
- 纸箱尺寸: 58x48x46cm
- 重量: 23.5KG





Ordercode: TPB211-C

## SOCAPEX power box

-防水19芯电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 63A 380V~
- Size: 54x42x42cm
- 3x Socapex 19pin Output
- 2x European socket output
- 1x 63A CEE 5p output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- IP Rated: IP44
- Ip67 Cover to protect the breaker
- Carton Size: 58x48x46cm
- Weight: 23.5KG

### 规格和参数:

- 电源输入: 5P 63A, 380V~
- 尺寸: 54x42x42cm
- 3x 19芯输出
- 2x 欧式座输出
- 1x 63A CEE 5针输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 防水等级: IP44
- 纸箱尺寸: 58x48x46cm
- 重量: 23.5KG

## FRENCH power box

-法式电源箱



Ordercode: TPB211-D

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 63A 380V~
- Size: 54x42x42cm
- 4x 32A CEE 5pin Output
- 8x French socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- IP Rated: IP44
- Ip67 Cover to protect the breaker
- Carton Size: 58x48x46cm
- Weight: 23.5KG

### 规格和参数:

- 电源输入: 5P 63A, 380V~
- 尺寸: 54x42x42cm
- 4x 32A 防水 CEE 5针输出
- 8x 法式座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 防水等级: IP44
- 纸箱尺寸: 58x48x46cm
- 重量: 23.5KG

## CEE WATERPROOF power box

-防水CEE电源箱



Ordercode: TPB210

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 63A 380V~
- Size: 54x42x42cm
- 4x 32A CEE 5pin Output
- 8x European socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- IP Rated: IP44
- Ip67 Cover to protect the breaker
- Carton Size: 58x48x46cm
- Weight: 23.5KG

### 规格和参数:

- 电源输入: 5P 63A, 380V~
- 尺寸: 54x42x42cm
- 4x 32A 防水 CEE 5针输出
- 8x 欧式座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 防水等级: IP44
- 纸箱尺寸: 58x48x46cm
- 重量: 23.5KG





Ordercode: TPB201

## 12ch CEE POWER RACK

### -12路CEE电源箱

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 63A, 380V~
- Size: 10U
- 12x16A CEE 3pin Output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- Main breaker 63A, with input LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 39KG

#### 规格和参数:

- 电源输入: 5P 63A, 380V~
- 尺寸: 10U
- 12x16A防水CEE3针输出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 主开关63A, 带输入指示灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 39KG



Ordercode: TPB202

## 24ch CEE POWER RACK

### -24路CEE电源箱

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 200A/400A, 380V~
- Size: 62x71x88cm
- 24x16A CEE 3pin Output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 60KG

#### 规格和参数:

- 电源输入: 5P 200A/400A, 380V~
- 尺寸: 62x71x88cm
- 24x16A防水CEE3针输出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 60KG



Ordercode: TPB203

## 24ch CEE POWER RACK

### -24路CEE电源箱

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 200A/400A, 380V~
- Size: 62x71x88cm
- 24x16A CEE 3pin Output
- 2x Multi-socket output
- 2x32A 5pin output with breaker
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 60KG

#### 规格和参数:

- 电源输入: 5P/400A, 380V~
- 尺寸: 62x71x88cm
- 24x16A防水CEE3针输出
- 2x32A 5针输出带开磁
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 60KG







Ordercode: TPB-204

# 36ch CEE POWER RACK

## -36路CEE电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 62x71x88cm
- 36x16A CEE 3pin Output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 60KG

### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 62x71x88cm
- 36x16A防水CEE3针输出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 60KG





Ordercode: TPB205

## 48ch power rack

### -48路电源箱

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 62x71x88cm
- 48x16A CEE 3pin Output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 78KG

#### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 62x71x108cm
- 48x16A防水CEE3针输出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 78KG



Ordercode: TPB206

## CEE power rack

### -CEE电源箱

#### SPECIFICATIONS AND FEATURES:

- Power Input: 400A 5P, 380V~
- Size: 23U Rack
- 60x16A CEE 3pin Output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 92KG

#### 规格和参数:

- 电源输入: 400A, 380V~
- 尺寸: 23U机柜
- 60x16A防水CEE3针输出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 92KG



Ordercode: TPB207

## CEE power rack

### -CEE电源箱

#### SPECIFICATIONS AND FEATURES:

- Power Input: 63A, 380V~
- Size: 14U Rack
- 12x16A CEE 3pin Output
- 4x32A CEE 5P output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 68KG

#### 规格和参数:

- 电源输入: 63A, 380V~
- 尺寸: 14U
- 12x16A防水CEE3针输出
- 4x32A防水CEE5针输出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 68KG





Ordercode: TPB208

## CEE POWER RACK

### -CEE电源箱

#### SPECIFICATIONS AND FEATURES:

- Power Input: Camelock 400A, 380V~
- Size: 62x71x88cm
- 6x16A CEE 3pin Output
- 12x32A CEE 5P output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 72KG

#### 规格和参数:

- 电源输入: 400A, 380V~
- 尺寸: 62x71x88cm
- 6x16A防水CEE3针输出
- 12x32A防水CEE5针输出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 72KG



Ordercode: TPB209

## 32A POWER RACK

### -32A电源箱

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 62x71x88cm
- 6x16A CEE 3pin Output
- 2x Multi-socket output
- 8x32A 5pin output
- Each output has LED indicator lights
- 400A in and 400A 5P output
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 72KG

#### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 62x71x88cm
- 6x16A防水CEE3针输出
- 8x32A5芯输出
- 2x万用座输出
- 带400A环出
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 72KG





Ordercode: TPB212

## CEE POWER RACK

-CEE电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 62x71x88cm
- 6x32A Output
- 2x Multi-socket output
- 12xCEE 16A 3P output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 68KG



Ordercode: TPB213

## CEE POWER RACK

-CEE电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 14U
- 18xCEE 16A Output
- 2x Multi-socket output
- 3x CEE 32A output
- 400A input
- Each output has LED indicator lights
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 75KG





Ordercode: TPB214

## CEE POWER RACK

-CEE电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 63A, 380V~
- Size: 10U
- 4x16A CEE 3pin Output
- 2x Multi-socket output
- 3x32A CEE 5pin output
- Each output has LED indicator lights
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 48KG

### 规格和参数:

- 电源输入: 5P 63A, 380V~
- 尺寸: 10U
- 4x16A防水CEE3针输出
- 2x万用座输出
- 3x32A CEE 5芯输出
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 48KG



Ordercode: TPB215



## 125A POWER RACK

-125A电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 125A, 380V~
- Size: 10U
- 6x32A CEE 5P Output
- 2x 63A output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 65KG

### 规格和参数:

- 电源输入: 5P 125A, 380V~
- 尺寸: 10U
- 6x32A CEE输出
- 2x63A CEE输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 65KG



Ordercode: TPB216



## 125A POWER RACK

-125A电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 125A, 380V~
- Size: 10U
- 2xSOCAPEX Output
- 12xSchuko output
- 1x125A CEE 5P input
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Earthproof flightcase
- Flightcase color can optional (Black as normal)
- Weight: 55KG

### 规格和参数:

- 电源输入: 5P 125A, 380V~
- 尺寸: 12U
- 2x19芯 SOCAPEX输出
- 12x欧式座输出
- 1x125A CEE5针输入
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 防震航空箱
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 55KG



Ordercode: TPB217



## 400A POWER RACK

-400A电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 6U
- 12xCEE 16A Output
- 2x Multi-socket output
- Each output has LED indicator lights
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- Flightcase color can optional (Black as normal)
- Weight: 16KG

### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 6U
- 12xCEE 16A输出
- 2x万用座输出
- 每路单独开关控制
- 电流电压表
- 双层防震航空箱, 静音轮
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 16KG



## CEE POWER RACK

### -CEE电源箱



Ordercode: TPB218

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 10U
- 12x32A CEE 5pin Output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 55KG

#### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 10U
- 12x32A防水CEE5针输出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 55KG

## 63A CEE POWER RACK

### -63A CEE电源箱



Ordercode: TPB219

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 63A, 380V~
- Size: 62x71x88cm
- 18x16A CEE 3pin Output
- 3xSocapex Output
- 1x 32A CEE 5P output
- 1x 63A CEE 5P output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 68KG

#### 规格和参数:

- 电源输入: 5P 63A, 380V~
- 尺寸: 62x71x88cm
- 18x16A防水CEE3针输出
- 3xSocapex输出
- 1x32A5针输出
- 1x63A5针输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 68KG

## 125A CEE POWER RACK

### -125A CEE电源箱



Ordercode: TPB220

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 125A, 380V~
- Size: 16U
- 24x16A CEE 3pin Output
- 3x63A CEE 5pin Output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 75KG

#### 规格和参数:

- 电源输入: 5P 125A, 380V~
- 尺寸: 16Ucm
- 24x16A防水CEE3针输出
- 3x63A防水CEE5针输出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 60KG





Ordercode: TPB221

## 400A POWER RACK

### -400A电源箱

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 18U
- 3x400A 5P Output
- 4x Multi-socket output
- 4xCEE 16A 3P output
- 2x32A CEE 5P output
- Each 400A output have power meter
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- Main breaker 400A
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 85KG

#### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 18U
- 3x400A环出
- 4xCEE 16A输出
- 4x万用座输出
- 2x32A CEE5针输出
- 每路环出带电流电压表
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 85KG



## CEE POWER RACK



Ordercode: TPB222

### SPECIFICATIONS AND FEATURES:

- Power Input: 125A, 380V~
- Size: 62x71x108cm
- 6x19pin Socapex output
- 3x16A CEE 3P output
- 3x32A CEE 5P output
- 1x63A CEE 5P output
- 2x Multi-socket output
- Each output has LED indicator lights
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Weight: 75KG

## CEE POWER RACK



Ordercode: TPB223

### SPECIFICATIONS AND FEATURES:

- Power Input: 400A, 380V~
- Size: 62x71x134cm
- 9x32A CEE 5P output
- 6x63A CEE 5P output
- 2x125A CEE 5P output
- 400A 5P output
- 2x Multi-socket output
- Each output has breaker
- Each output has LED indicator lights
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Weight: 108KG







Ordercode: TPB224

## 400A POWER RACK

-400A电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 400A, 380V~
- Size: 62x71x125cm
- 6x16A CEE 3pin Output
- 9xSocapex 19pin output
- 1x63A CEE 5P output
- 1x32A CEE 5P output
- 2x125A CEE 5P output
- 400A 5P output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 102KG

### 规格和参数:

- 电源输入: 400A, 380V~
- 尺寸: 62x71x125cm
- 6x16A防水CEE3针输出
- 1x32A防水CEE5针输出
- 1x63A防水CEE5针输出
- 2x125A防水CEE5针输出
- 400A欧式环出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 102KG





## 400A POWER RACK

-400A电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 400A, 380V~
- Size: 62x71x134cm
- 12x19pin Socapex Output
- 8x32A CEE 5P output
- 6x16A CEE 3P output
- 2x125A CEE 5P output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 110KG

### 规格和参数:

- 电源输入: 400A, 380V~
- 尺寸: 62x71x134cm
- 12x19芯SOCAPEX输出
- 8x32A防水CEE5针输出
- 6x16A防水CEE3针输出
- 2x125A防水CEE5针输出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 110KG

Ordercode: TPB225



## 125A POWER RACK

-125A电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 125A, 380V~
- Size: 62x71x106cm
- 6x19pin Socapex Output
- 4x32A CEE 5P output
- 12x16A CEE 3P output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 98KG

### 规格和参数:

- 电源输入: 125A, 380V~
- 尺寸: 62x71x106cm
- 6x19芯SOCAPEX输出
- 4x32A防水CEE5针输出
- 12x16A防水CEE3针输出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 98KG

Ordercode: TPB226





## 302 POWER RACK

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 12U
- 1xDMX Isolated Splitter 8
- 18x30A Output
- 6x Euro-socket output
- 400A 5P output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 65KG

Ordercode: TPB227



## 302 POWER RACK

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 14U
- 12x30A Output
- 6x Euro-socket output
- 400A 5P output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 68KG

Ordercode: TPB228





Ordercode: TPB229

# 400A POWER RACK

## -400A电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 22U
- 12xSchuko output
- 6x32A CEE 5P output
- 9x30A output
- 400A Camlock output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase color can optional (Black as normal)
- Weight: 98KG

### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 22U
- 12x欧式座输出
- 6xCEE 32A输出
- 9x30A输出
- 带400A环出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 75KG



## 12ch power rack

-12路电源箱



Ordercode: TPB230

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 10U
- 2x Multi-socket output
- 2x 19pin Socopec output
- Each output has LED indicator lights
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 48KG

### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 10U
- 2x 19芯输出
- 2x 万用座输出
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 48KG

## 24ch power rack

-24路电源箱



Ordercode: TPB231

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 62x71x88cm
- 2x Multi-socket output
- 4x 19pin Socopec output
- Each output has LED indicator lights
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 72KG

### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 62x71x88cm
- 4x 19芯输出
- 2x 万用座输出
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 72KG

## 36ch power rack

-36路电源箱



Ordercode: TPB232

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 62x71x88cm
- 2x Multi-socket output
- 6x 19pin Socopec output
- Each output has LED indicator lights
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 72KG

### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 62x71x88cm
- 6x 19芯输出
- 2x 万用座输出
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 72KG





## 48ch power rack

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 62x71x88cm
- 8x19P Socapex Output
- 400A Camlock Output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 75KG

Ordercode: TPB233



## 72ch socapex rack

### SPECIFICATIONS AND FEATURES:

- Power Input: 400A, 380V~
- Size: 62x71x106cm
- 12xSOCAPEX Output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 84KG

Ordercode: TPB234





Ordercode: TPB235

## 96ch SOCAPEX RACK

### -96路SOCAPEX电源箱

#### SPECIFICATIONS AND FEATURES:

- Power Input: 400A, 380V~
- Size: 20U
- 16x19P SOCAPEX Output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight : 88KG

#### 规格和参数:

- 电源输入: 400A, 380V~
- 尺寸: 20U
- 16x19芯 SOCAPEX输出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 88KG





Ordercode: TPB236

## POWERLOCK POWER RACK

### -120路SOCAPEX电源箱

#### SPECIFICATIONS AND FEATURES:

- Power Input: 400A, 380V~
- Size: 29U
- 1X400A Powerlock output
- 20x19P SOCAPEX Output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has RCD breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight : 120KG

#### 规格和参数:

- 电源输入: 400A, 380V~
- 尺寸: 29U
- 20x19芯 SOCAPEX输出
- 400A欧式一进一出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 120KG







Ordercode: TPB237

## 400A POWER RACK

-400电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 29U
- 4x32A CEE 5pin Output
- 2x Multi-socket output
- 24x19pin Socapex output
- Each output has LED indicator lights
- 400A Powerlock in and 400A 5P output
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 110KG

### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 29U
- 4x32A防水CEE5针输出
- 24x19芯输出
- 2x万用座输出
- 带400A环出
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 110KG



# TAURUS<sup>®</sup>

## LIGHT



Ordercode: TPB238

# 48ch power rack

## -48路电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 62x71x88cm
- 12x16A CEE 3pin Output
- 2x Multi-socket output
- 6x19pin Socapex output
- Each output has LED indicator lights
- 400A in and 400A 5P output
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 72KG

### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 62x71x88cm
- 12x16A防水CEE3针输出
- 6x19芯输出
- 2x万用座输出
- 带400A环出
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 72KG



特洛斯灯光<sup>®</sup>  
www.tauruslight.com



Ordercode: TPB239

## 400A POWER RACK

-400A电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 18U
- 10x32A CEE 3pin Output
- 2x Multi-socket output
- 8x19pin Socapex output
- 6xEdison socket output
- Each output has LED indicator lights
- 400A in and 400A 5P output
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 85KG

### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 62x71x106cm
- 10x32A防水CEE3针输出
- 8x19芯输出
- 2x万用座输出
- 6x美式座输出
- 带400A环出
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 85KG



Ordercode: TPB240

## 50ch POWER RACK

-50路电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 18U
- 12x16A CEE 3pin Output
- 2x Multi-socket output
- 6x19pin Socapex output
- 2x32A CEE 5pin output
- Each output has LED indicator lights
- 400A in and 400A 5P output
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 75KG

### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 62x71x88cm
- 12x16A防水CEE3针输出
- 6x19芯输出
- 2x万用座输出
- 2x32A CEE 5芯输出
- 带400A环出
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 75KG





Ordercode: TPB241

## 125A POWER RACK

### -125A电源箱

#### SPECIFICATIONS AND FEATURES:

- Power Input: 125A, 380V~
- Size: 27U
- 6xSchuko output
- 8xSocapex Output
- 4x32A CEE 5pin Output
- 1x63A CEE 5pin output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 95KG

#### 规格和参数:

- 电源输入: 5P 125A, 380V~
- 尺寸: 27U
- 6x欧式座输出
- 8x19芯SOCAPEX输出
- 4x32A防水CEE5针输出
- 1x63A CEE输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 95KG





Ordercode: TPB242

## SOCAPEX POWER RACK

### -400A电源箱

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 20U
- 6xEdison socket output
- 2x Multi-socket output
- 16x19pin Socapex output
- Each output has LED indicator lights
- 400A in and 400A 5P output
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 85KG

#### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 20U
- 6x美式座输出
- 16x19芯输出
- 2x万用座输出
- 带400A环出
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 85KG





Ordercode: TPB243

## SOCAPEX POWER RACK

### -400A电源箱

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 62x71x108cm
- 12x16A CEE 3pin Output
- 2x Multi-socket output
- 8x19pin Socapex output
- 2x32A CEE 5pin output
- Each output has LED indicator lights
- 400A in and 400A 5P output
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 78KG

#### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 62x71x108cm
- 12x16A防水CEE3针输出
- 8x19芯输出
- 2x万用座输出
- 2x32A CEE 5芯输出
- 带400A环出
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 78KG





Ordercode: TPB244

## POWERLOCK POWER RACK

-400A电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 400A, 380V~
- Size: 24U
- 16x19pin SocaPex output
- 3x63A CEE 5P output
- Schneider breaker
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 98KG

### 规格和参数:

- 电源输入: 400A, 380V~
- 尺寸: 24U
- 16x19芯SOCAPEX输出
- 3x63A CEE 5针输出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 98KG





Ordercode: TPB245

# 32A power distributor

## -32A电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 32A CEE 5P, 380V~
- Size: 9U
- 1x19pin Socapex output
- 6xSchuko socket output
- RCD protection for main
- 2x Multi-socket output
- Each output has LED indicator lights
- RCD for each output
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 45KG

### 规格和参数:

- 电源输入: 32A, 380V~
- 尺寸: 9U
- 1x19芯SOCAPEX输出
- 6x欧式座输出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 45KG







Ordercode: TPB246

## 400A POWER RACK

-美式电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 400A, 380V~
- Size: 62x71x88cm
- 6xEdison socket output
- 4x19pin socapex output
- 3x32A 3P output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 75KG

### 规格和参数:

- 电源输入: 400A, 380V~
- 尺寸: 62x71x88cm
- 6x美式座输出
- 4x19芯SOCAPEX输出
- 3x32A 3针输出
- 2x美式座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 75KG

## edison power rack

-美式电源箱



Ordercode: TPB247

### SPECIFICATIONS AND FEATURES:

- Power Input: 400A, 380V~
- Size: 62x71x88cm
- 22xEdison socket output
- 4x19pin socapex output
- 400A 5P output
- 2x EDISON Socket output
- Each output has LED indicator lights
- Each output has breaker 2P
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 75KG

### 规格和参数:

- 电源输入: 400A, 380V~
- 尺寸: 62x71x88cm
- 22x美式座输出
- 4x19芯SOCAPEX输出
- 400A环出
- 2x美式座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 75KG

## edison power rack

-美式电源箱



Ordercode: TPB248

### SPECIFICATIONS AND FEATURES:

- Power Input: 400A, 380V~
- Size: 62x71x88cm
- 13xEdison socket output
- 9xL21-30 output
- 400A 5P output
- Each output has LED indicator lights
- Each output has breaker 2P
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 75KG

### 规格和参数:

- 电源输入: 400A, 380V~
- 尺寸: 62x71x88cm
- 13x美式座输出
- 9x美式30A输出
- 400A环出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 75KG





Ordercode: TPB249

## 400A POWER RACK

-美式电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 400A, 380V~
- Size: 62x71x88cm
- 6xEdison socket output
- 6xCEE 16A socket output
- 8x19pin socapex output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 75KG

### 规格和参数:

- 电源输入: 400A, 380V~
- 尺寸: 62x71x88cm
- 6x美式座输出
- 8x19芯SOCAPEX输出
- 6x16A输出
- 2x美式座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 75KG





Ordercode: TPB250

## 400A POWER RACK

### -欧式电源箱

#### SPECIFICATIONS AND FEATURES:

- Power Input: Powerlock 400A, 380V~
- Size: 62x71x88cm
- 4x32A CEE 5P output
- 4x63A CEE 5P output
- 400A Powerlock output
- 2x Multi-socket output
- Each output has LED indicator lights
- RCD for main and output breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 75KG

#### 规格和参数:

- 电源输入: 400A, 380V~
- 尺寸: 62x71x88cm
- 4x32A5针输出
- 4x63A5针输出
- 400A环出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 75KG





Ordercode: TPB251

## 24ch edison power rack

### -24路美式电源箱

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 200A/400A, 380V~
- Size: 62x71x88cm
- 24xEdison Output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 60KG

#### 规格和参数:

- 电源输入: 5P 200A/400A, 380V~
- 尺寸: 62x71x88cm
- 24x美式座输出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 60KG

## 63A POWERCON RACK

### -63A电源箱



Ordercode: TPB-252

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 63A, 380V~
- Size: 14U
- 6xSocapex Output
- 2x 16A CEE 3P output
- 2x UK 13A output
- Each output has LED indicator lights
- Each output has RCD breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 65KG

#### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 14U
- 6xSocapex输出
- 2x16A输出
- 2x英式13A输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 65KG

## 400A POWERCON RACK

### -POWERCON电源箱



Ordercode: TPB-253

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 12U
- 18xPowercon Output
- 400A Camlock Output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 60KG

#### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 62x71x81.5
- 18xPowercon输出
- 2x万用座输出
- 400A环出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 60KG



## 125A POWER RACK

-125A电源箱



Ordercode: TPB254

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 125A, 380V~
- Size: 10U
- 1xSOCAPEX Output
- 3xCEE 16A 3P output
- 4x32A CEE 5P output
- 1x63A CEE 5P output
- 125A 5P output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 85KG

### 规格和参数:

- 电源输入: 5P 125A, 380V~
- 尺寸: 10U
- 1x19芯 SOCAPEX输出
- 3xCEE 16A输出
- 4x32A CEE输出
- 1x63A输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 85KG

## SOCAPEX POWER RACK

-400A电源箱



Ordercode: TPB255

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 10U
- 4xSOCAPEX Output
- 2x Edison socket output
- 1x400A output
- 5xCEE 32A CEE 3P output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 58KG

### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 10U
- 4x19芯 SOCAPEX输出
- 1x400A输出
- 2x美式座输出
- 5x32A CEE 3针输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 58KG

## CEE POWER RACK

-CEE电源箱



Ordercode: TPB256

### SPECIFICATIONS AND FEATURES:

- Power Input: 63A, 380V~
- Size: 62x71x88cm
- 3x32A CEE 5P output
- 9xPowercon output
- 6xEdison socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 60KG

### 规格和参数:

- 电源输入: 63A, 380V~
- 尺寸: 62x71x88cm
- 3x32A防水CEE5针输出
- 9xPowercon输出
- 6x美式座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 60KG



## DIMMER POWER RACK

-数字硅电源箱



Ordercode: TPB257

### SPECIFICATIONS AND FEATURES:

- Power Input: 63A, 380V~
- Size: 12U
- 12 Channel Digital Dimmer Pack with socapex output
- 2x19pin Socapex output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 60KG

### 规格和参数:

- 电源输入: 63A, 380V~
- 尺寸: 12U
- 12路数字硅箱带19芯输出
- 2x19芯SOCAPEX输出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 60KG

## 63A POWER RACK

-63A电源箱



Ordercode: TPB258

### SPECIFICATIONS AND FEATURES:

- Power Input: 63A, 380V~
- Size: 12U
- 12x16A CEE 3P output
- 2x19pin Socapex output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 60KG

### 规格和参数:

- 电源输入: 63A, 380V~
- 尺寸: 12U
- 12x16A防水CEE3针输出
- 2x19芯SOCAPEX输出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 60KG

## 400A POWER RACK

-400A电源箱



Ordercode: TPB259

### SPECIFICATIONS AND FEATURES:

- Power Input: 400A, 380V~
- Size: 22U
- 12x30A socket output
- 4x19pin Socapex output
- 2x6 Channel dimmer with 30A output
- 400A 5P output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 95KG

### 规格和参数:

- 电源输入: 400A, 380V~
- 尺寸: 22U
- 12x30A输出
- 4x19芯SOCAPEX输出
- 2x6路6KW硅箱输出
- 400A环出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 95KG





Ordercode: TPB260

## 400A POWER RACK

-400A电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 400A, 380V~
- Size: 24U
- 12x16A CEE PCE 3P output
- 8x19pin Socapex output
- 3x32A CEE 5P output
- 3x63A CEE 5P output
- 400A 5P output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 98KG

### 规格和参数:

- 电源输入: 400A, 380V~
- 尺寸: 24U
- 12x16A防水CEE3针输出
- 2x19芯SOCAPEX输出
- 3x32A CEE 5针输出
- 3x63A CEE 5针输出
- 400A环出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 98KG

## 400A POWER RACK

-400A电源箱



Ordercode: TPB261

### SPECIFICATIONS AND FEATURES:

- Power Input: 400A, 380V~
- Size: 21U
- 12x16A CEE PCE 3P output
- 2x19pin Socapex output
- 3x32A CEE 5P output
- 3x63A CEE 5P output
- 1x12 Channel dimmer pack with socapex output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 98KG

### 规格和参数:

- 电源输入: 400A, 380V~
- 尺寸: 21U
- 12x16A防水CEE3针输出
- 2x19芯SOCAPEX输出
- 3x32A CEE 5针输出
- 3x63A CEE 5针输出
- 1x12路数字硅箱带SOCAPEX输出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 98KG





## edison power rack

- 美式电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 400A, 5P, 380V~
- Size: 18U
- 18xEdison socket output
- 3x32A CEE 3P output
- 3x32A CEE 5P output
- 1x12 Channel dimmer pack with edison output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 85KG

### 规格和参数:

- 电源输入: 400A, 5P, 380V~
- 尺寸: 18U
- 18x美式座输出
- 3x32A5针输出
- 3x32A3针输出
- 1x12路数字硅箱带美式座输出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 85KG

Ordercode: TPB262



## 125A power rack

- 125A电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 125A, 380V~
- Size: 14U
- 3xSOCAPEX Output
- 6xSchuko output
- 1x32A CEE 5P output
- 1x125A CEE 5P output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Earthproof flightcase
- Flightcase color can optional (Black as normal)
- Weight: 68KG

### 规格和参数:

- 电源输入: 5P 125A, 380V~
- 尺寸: 14U
- 3x19芯 SOCAPEX输出
- 6xSchuko输出
- 1x32A防水5针输出
- 1x125A CEE5针输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 防震航空箱
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 68KG

Ordercode: TPB263





## 400A POWER RACK

-400A电源箱



### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 16U
- 8x Socapex Output
- 2x Multi-socket output
- 1x 400A Powerlock output
- 2x 63A CEE 5pin output
- Each output has LED indicator lights
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 82KG

### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 16U
- 2x 63A 防水CEE输出
- 8x 19芯输出
- 2x 万用座输出
- 400A 欧式输出
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 82KG

Ordercode: TPB264



## India power rack

-印度电源箱



### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 63A, 380V~
- Size: 12U
- 6x India socket output
- 2x Multi-socket output
- 12x 16A CEE 3P output
- 3x 32A CEE 5pin output
- Each output has LED indicator lights
- With overvoltage protection
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 65KG

### 规格和参数:

- 电源输入: 5P 63A, 380V~
- 尺寸: 12U
- 6x 印度座输出
- 12x CEE 16A 输出
- 2x 万用座输出
- 3x 32A CEE 5芯输出
- 带低压高压保护
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 65KG

Ordercode: TPB265





Ordercode: TPB266

# edison power rack

## -美式电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 21U
- 36xEdison Output
- 2x Multi-socket output
- 6xSocapex output
- Each output has LED indicator lights
- 400A in and 400A 5P output
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 85KG

### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 21U
- 36x美式座输出
- 2x万用座输出
- 6x19芯输出
- 带400A环出
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 85KG





Ordercode: TPB267

## CEE POWER RACK

-CEE电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 63A, 380V~
- Size: 10U
- 12x32A CEE 3pin Output
- 6xEdison output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 35KG

### 规格和参数:

- 电源输入: 63A, 380V~
- 尺寸: 10U
- 12x32A防水CEE3针输出
- 6x美式座输出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 35KG

## 36ch POWER RACK

-636路电源箱



Ordercode: TPB268

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 125A, 380V~
- Size: 14U
- 6xSocapex output
- 1x125A 5P output
- 2x Multi-socket output
- Each output has LED indicator lights
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 72KG

### 规格和参数:

- 电源输入: 5P 125A, 380V~
- 尺寸: 14U
- 6xSocapex输出
- 1x125A输出
- 2x万用座输出
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 72KG

## 2P POWER RACK

-胶木插电源箱



Ordercode: TPB269

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 12U
- 1xDigital Dimmer Pack with 10A Output
- 12x 10A output
- 2xmulti socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 68KG

### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 12U
- 12路数字硅箱带胶木插输出
- 12x胶木插输出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 68KG





Ordercode: TPB270

## 42ch SOCAPLEX RACK

-42路电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 18U
- 2x Multi-socket output
- 24xCEE 16A 3P output
- 18xEdison socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 75KG

### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 18U
- 18x美式座输出
- 24xCEE 16A输出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 75KG

## 24ch DIMMER POWER RACK

-24路硅箱柜



Ordercode: TPB271

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 125A, 380V~
- Size: 14U
- 2x Multi-socket output
- 24xSchuko socket output
- 2x12 channel dimmer pack
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 82KG

### 规格和参数:

- 电源输入: 5P 125A, 380V~
- 尺寸: 14U
- 24x欧式座输出
- 2x12路硅箱
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 82KG

## 36ch POWER RACK

-36路电源箱



Ordercode: TPB272

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 14U
- 2x Multi-socket output
- 1x400A output
- 4xSocapex output
- 12x16A CEE 3P output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 82KG

### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 14U
- 12x16A CEE输出
- 4x19芯输出
- 1x400A输出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 82KG





Ordercode: TPB273

## EDISON SOCAPEX RACK

-美式电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 63A, 380V~
- Size: 16U
- 2x Multi-socket output
- 27xEdison socket output
- 3x32A CEE 5P
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 69KG

### 规格和参数:

- 电源输入: 5P 63A, 380V~
- 尺寸: 16U
- 27x美式座输出
- 2x万用座输出
- 3x32A CEE 5针
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 75KG



Ordercode: TPB274

## EDISON POWER RACK

-美式电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 16U
- 2x Multi-socket output
- 36xEdison socket output
- 400A 5P output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 75KG

### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 16U
- 36x美式座输出
- 2x万用座输出
- 400A 5P输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 75KG



Ordercode: TPB275

## SOCAPEX POWER RACK

-400A电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 24U
- 63xEdison Output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- Each output with RCD
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 85KG

### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 24U
- 63x美式座输出
- 2x万用座输出
- 带漏电保护
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 85KG





Ordercode: TPB276

## 63ACEE POWER RACK

### -63ACEE电源箱

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 63A, 380V~
- Size: 12U
- 12x16A CEE 3pin Output
- 2xSocapex output
- 1x63A output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- Each output with RCD
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 60KG

#### 规格和参数:

- 电源输入: 5P 63A, 380V~
- 尺寸: 12U
- 12x16A防水CEE3针输出
- 2x万用座输出
- 2xSocapex 19芯
- 1x63A 5针输出
- 带漏电保护
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 60KG



Ordercode: TPB277

## CEE POWER RACK

### -CEE电源箱

#### SPECIFICATIONS AND FEATURES:

- Power Input: 400A 5P, 380V~
- Size: 14U Rack
- 24x16A CEE 3pin Output
- 1x32A CEE 5P output
- 1x63A CEE 5P output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 68KG

#### 规格和参数:

- 电源输入: 400A, 380V~
- 尺寸: 14U机柜
- 24x16A防水CEE3针输出
- 1x32A防水CEE5针输出
- 1x63A防水CEE5针输出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 68KG



Ordercode: TPB278

## 125A POWER RACK

### -125A电源箱

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 125A, 380V~
- Size: 18U
- 12x16A 3P Output
- 2x Multi-socket output
- 1x125A CEE 5P output
- 24xEuropean socket output
- 125A output
- Each output has LED indicator lights
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 85KG

#### 规格和参数:

- 电源输入: 5P 125A, 380V~
- 尺寸: 18U
- 12x16A CEE 3针输出
- 1x125A5针输出
- 2x万用座输出
- 24x欧式座输出
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 85KG



## 63A POWER RACK



Ordercode: TPB279

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 63A, 380V~
- Size: 14U
- 3x32A 3P Output
- 3x16A 3P output
- 3x32A 5P output
- 9xEdison socket output
- Each output has LED indicator lights
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 82KG



Ordercode: TPB280

## 125A POWER RACK

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 125A, 380V~
- Size: 24U
- 6x16A CEE 3pin Output
- 2x Multi-socket output
- 1x32A CEE 5P output
- 1x63A CEE 5P output
- 8xSocapex 19P output
- Each output has LED indicator lights
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 105KG





Ordercode: TPB281

## 63A POWER RACK

### -63A电源箱

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 63A, 380V~
- Size: 62x71x88cm
- 2x Multi-socket output
- 3x19pin Socapex output
- 1x63A CEE 5P output
- 6x16A CEE 3P output
- Each output has LED indicator lights
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 55KG

#### 规格和参数:

- 电源输入: 5P 63A, 380V~
- 尺寸: 62x71x88cm
- 3x19芯输出
- 6x16A 3P输出
- 1x63A 5P输出
- 2x万用座输出
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 55KG







Ordercode: TPB282

## 400A POWER RACK

### -400A电源箱

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 26U
- 16xSocapex output
- 2x Multi-socket output
- 6xEdison socket output
- 1x400A output
- Each output has LED indicator lights
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 115KG

#### 规格和参数:

- 电源输入: 5P 125A, 380V~
- 尺寸: 24U
- 6x美式座输出
- 1x63A5针输出
- 2x万用座输出
- 16x19芯输出
- 1x400A输出
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 115KG





Ordercode: TPB283

## 400A POWER RACK

### -400A电源箱

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 22U
- 8xAustrial socket 32A Output
- 8x Austrial socket 16A output
- 3x 63A output
- 3x 16A output
- 400A input and output
- Each output has LED indicator lights
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 98KG

#### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 22U
- 8x澳座32A输出
- 8x澳座16A输出
- 400A输出
- 3x32A输出
- 3x16A输出
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 98KG





Ordercode: TPB284

## 400A POWER RACK

-400A电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 16U
- 18xEdison Output
- 2x Multi-socket output
- 3x32A CEE 5P output
- 3x32A CEE 3P output
- 1x63A CEE 5P output
- 400A output
- Each output has LED indicator lights
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 88KG

### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 16U
- 3x32A防水CEE3针输出
- 1x63A5针输出
- 2x万用座输出
- 18x美式座输出
- 3x32A 5针输出
- 400A环出
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 88KG





Ordercode: TPB285

## 400A POWER RACK

### -400A电源箱

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 20U
- 36x16A CEE 3pin Output
- 2x Multi-socket output
- 2x32A CEE 5P output
- 1x63A CEE 5P output
- 9xPowercon output
- Each output has LED indicator lights
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 88KG

#### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 20U
- 36x16A防水CEE3针输出
- 1x63A5针输出
- 2x万用座输出
- 9xPowercon输出
- 2x32A5针输出
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 88KG

## 27ch POWER RACK

### -27路电源箱



Ordercode: TPB286

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 10U
- 27xPowercon Output
- 2x Multi-socket output
- Each output has LED indicator lights
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 45KG

#### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 10U
- 27xPowercon输出
- 2x万用座输出
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 带LED照明灯
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 45KG

## CEE POWER RACK

### -CEE电源箱



Ordercode: TPB287

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 63A, 380V~
- Size: 10U
- 6x32A 5P Output
- 6x Powercon output
- 4x 32A 3P output
- 2xmulti-socket output
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- With back illuminate LED lights
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 45KG

#### 规格和参数:

- 电源输入: 5P 63A, 380V~
- 尺寸: 10U
- 6x32A5针输出
- 4x32A3针输出
- 6xPowercon输出
- 2x万用座输出
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 45KG



# TAURUS<sup>®</sup> LIGHT



Ordercode: TPB288

## IP 4002 power box -防水400A电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 400A, 380V~
- Size: 44x30x30cm
- 1X400A Output
- Multi power meter
- 4xSocapex Output
- 4xEdison socket output
- With handle easy move
- Each output has breaker
- IP Rate:IP44
- Weight: 11.5KG

### 规格和参数:

- 电源输入: 5P 400A, 380V~
- 尺寸: 44x30x30cm
- 4x19芯输出
- 4x美式座输出
- 1x400A环出
- 每路单独开关控制
- 一体电流电压表
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 11.5KG



特洛斯灯光<sup>®</sup>  
www.tauruslight.com



Ordercode: TPB289

## IP POWER RACK

### -63A电源箱

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 63A, 380V~
- Size: 600x400x545mm
- 16xCEE 16A Output
- 1xCEE 32A 5P Output
- 1x63A CEE 5P output
- Each output has LED indicator lights
- Each output has Schneider breaker
- Multi-function power meter
- IP cover for all breaker
- Weight: 24KG

#### 规格和参数:

- 电源输入: 5P 63A, 380V~
- 尺寸: 600x400x545mm
- 16xCEE 16A输出
- 1xCEE 63A输出
- 1x32A防水5针输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 所有开关带防雨盖
- 重量: 24KG





Ordercode: TPB290

## IP POWER RACK

### -63A电源箱

#### SPECIFICATIONS AND FEATURES:


- Power Input: 5P 63A, 380V~
- Size: 600x400x545mm
- 6xCEE 16A Output
- 6xCEE 32A 3P Output
- 2xCEE 32A 3P Output
- 1x63A CEE 5P output
- Each output has LED indicator lights
- RCD&RCBO breaker
- Multi-function power meter
- IP cover for all breaker
- Weight: 24KG

#### 规格和参数:

- 电源输入: 5P 63A, 380V~
- 尺寸: 600x400x545mm
- 6xCEE 16A输出
- 1xCEE 63A输出
- 2x32A防水5针输出
- 6x32A防水3针输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 所有开关带防雨盖
- 重量: 24KG



## POWERCON BOX




Ordercode: TPB001

### SPECIFICATIONS AND FEATURES:

- Power supply: 230 V AC, 50 Hz
- Max. power/channel: 3680 W
- Max. current/channel: 16 A
- Dimensions (L x W x H): 280 x 90 x 75 mm
- Weight: 1 kg
- Input: 1 x CEE plug blue 230 V/16 A, 3 poles
- Output: 1 x CEE inline jack blue 230 V/16 A, 3 poles
- 6 x P-Con outputs
- Designed for flexible use on stage or rig
- Truss attachment option (M10 inside thread)
- Robust steel housing
- Output plug (Power): CEE 16A 3P (F) 1x; P-Con 6x
- Power supply of device: CEE 16A 3-pol (m) recessed mounting

## POWERCON BOX



Ordercode: TPB002

### SPECIFICATIONS AND FEATURES:

- Power supply: 230 V AC, 50 Hz
- Max. power: 4600 W
- Max. current: 20 A
- Dimensions (L x W x H): 205 x 55 x 130 mm
- Weight: 0,75 kg
- 1 x P-Con input
- 5 x P-Con output
- Designed for flexible use on stage or rig
- Truss attachment option (M10 inside thread)
- Robust steel housing
- Output plug (Power): P-Con (Power-out) 5x
- Power supply of device: Mains Input Socket (M) Powercon





## powercon true1 box

-Powercon 电源盒



Ordercode: TPB003

### SPECIFICATIONS AND FEATURES:


- Power supply: 230 V AC, 50 Hz
- Max. power: 4600 W
- Max. current: 20 A
- Dimensions (L x W x H): 205 x 55 x 130 mm
- Weight: 0,75 kg
- 1 x P-Con True1 input
- 5 x P-Con True1 output
- Designed for flexible use on stage or rig
- Truss attachment option (M10 inside thread)
- Robust steel housing
- Output plug (Power): True1 (Power-out) 5x
- Power supply of device: Mains Input Socket (M) True1

### 规格和参数:

- 电源输入: 230V AC~, 50Hz
- 尺寸: 205x55x130mm
- 最大功率: 4600W
- 最大电流: 20A
- 输入: 1x Powercon True1输入
- 输出: 5x Powercon True1输出
- 带灯钩位, 方便使用
- 铝材外壳
- 带指示灯
- 保险丝: 20A
- 重量: 0.75KG

## edison power box

-美式电源盒



Ordercode: TPB004

### SPECIFICATIONS AND FEATURES:


- Power supply: 230 V AC, 50 Hz
- Max. power: 4600 W
- Max. current: 20 A
- Dimensions (L x W x H): 205 x 55 x 130 mm
- Weight: 0,75 kg
- 1 x P-Con input
- 1 x P-Con output
- 6 x Edison socket output
- Designed for flexible use on stage or rig
- Truss attachment option (M10 inside thread)
- Robust steel housing
- Power supply of device: Mains Input Socket (M) Powercon

### 规格和参数:

- 电源输入: 230V AC~, 50Hz
- 尺寸: 205x55x130mm
- 最大功率: 4600W
- 最大电流: 20A
- 输入: 1x Powercon输入
- 输出: 6x 美式座输出
- 带灯钩位, 方便使用
- 铝材外壳
- 带指示灯
- 保险丝: 20A
- 重量: 0.75KG

## australia power box

-澳式电源盒



Ordercode: TPB005

### SPECIFICATIONS AND FEATURES:

- Power supply: 230 V AC, 50 Hz
- Max. power: 4600 W
- Max. current: 20 A
- Dimensions (L x W x H): 205 x 55 x 130 mm
- Weight: 0,75 kg
- 1 x P-Con input
- 1 x P-Con output
- 6 x Edison socket output
- Designed for flexible use on stage or rig
- Truss attachment option (M10 inside thread)
- Robust steel housing
- Power supply of device: Mains Input Socket (M) Powercon

### 规格和参数:

- 电源输入: 230V AC~, 50Hz
- 尺寸: 205x55x130mm
- 最大功率: 4600W
- 最大电流: 20A
- 输入: 1x Powercon输入
- 输出: 6x 美式座输出
- 带灯钩位, 方便使用
- 铝材外壳
- 带指示灯
- 保险丝: 20A
- 重量: 0.75KG



## powercon true box

-Powercon防水电源盒



Ordercode: TPB006

### SPECIFICATIONS AND FEATURES:

- Power supply: 230 V AC, 50 Hz
- Max. power: 4600 W
- Max. current: 20 A
- Dimensions (L x W x H): 455 x 54 x 63 mm
- Weight: 1,4 kg
- 1 x Powercon True1 input
- 9 x Powercon True1 output
- Designed for flexible use on stage or rig
- Truss attachment option (M10 inside thread)
- Robust steel profile housing
- Output plug (Power): P-Con (Power-out) 9x
- Power supply of device: Mains Input Socket (M)

### 规格和参数:

- 电源输入: 230V AC~, 50Hz
- 尺寸: 455x54x63mm
- 最大功率: 4600W
- 最大电流: 20A
- 输入: 1x Powercon TRUE1输入
- 输出: 9x Powercon TRUE1输出
- 带灯钩位, 方便使用
- 铝材外壳
- 带指示灯
- 保险丝: 20A
- 重量: 1.4KG

## powercon box

-POWERCON电源盒



Ordercode: TPB007

### SPECIFICATIONS AND FEATURES:

- Power supply: 230 V AC, 50 Hz
- Max. power: 4600 W
- Max. current: 20 A
- Dimensions (L x W x H): 455 x 54 x 63 mm
- Weight: 1,3 kg
- 1 x P-Con input
- 9 x P-Con output
- Designed for flexible use on stage or rig
- Truss attachment option (M10 inside thread)
- Robust steel profile housing
- Output plug (Power): P-Con (Power-out) 9x
- Power supply of device: Mains Input Socket (M)

### 规格和参数:

- 电源输入: 230V AC~, 50Hz
- 尺寸: 455x54x63mm
- 最大功率: 4600W
- 最大电流: 20A
- 输入: 1x Powercon输入
- 输出: 9x Powercon输出
- 带灯钩位, 方便使用
- 铝材外壳
- 带指示灯
- 保险丝: 20A
- 重量: 1.3KG

## SPEAKON power box

-SPEAKON电源盒



Ordercode: TPB008

### SPECIFICATIONS AND FEATURES:

- Power supply: 230 V AC, 50 Hz
- Max. power: 4600 W
- Max. current: 20 A
- Dimensions (L x W x H): 205 x 55 x 130 mm
- Weight: 0,75 kg
- 1 x SPEAKON input
- 5 x SPEAKON output
- Designed for flexible use on stage or rig
- Truss attachment option (M10 inside thread)
- Robust steel housing

### 规格和参数:

- 电源输入: 230V AC~, 50Hz
- 尺寸: 205x55x130mm
- 最大功率: 4600W
- 最大电流: 20A
- 输入: 1x SPEAKON输入
- 输出: 5x SPEAKON输出
- 带灯钩位, 方便使用
- 铝材外壳
- 带指示灯
- 重量: 0.75KG



# TAURUS<sup>®</sup> LIGHT



Ordercode: TPB009

## SOCAPEX TO EDISON BOX

### SPECIFICATIONS AND FEATURES:

- Power supply: 230 V AC, 50 Hz
- Max. current: 20 A
- Dimensions : 58x10x8cm
- Weight: 3 kg
- 1 x Socapex 19pin input
- 1 x Socapex 19pin output
- 12 x Edison socket output
- Designed for flexible use on stage or rigg
- Robust steel housing

### 规格和参数:

- 电源输入： 230V AC~,50Hz
- 尺寸： 58x10x8cm
- 输入： 1 x Socapex19芯输入
- 输出： 1 x Socapex19芯输出
- 输出： 12 x 美式座输出
- 带灯钩位，方便使用
- 铝材外壳
- 带指示灯
- 重量： 3KG



Ordercode: TPB010

## CEE POWER BOX

### SPECIFICATIONS AND FEATURES:

- Power supply: 380 V AC, 50 Hz
- Size: 40x30x15cm
- Weight: 3.48kg
- 1 x 32A 5Pin input
- 6 x 16A CEE 3P output
- Designed for flexible use on stage or rigg
- Each output has breaker
- Robust steel profile housing
- With plastic handle

### 规格和参数:


- 电源输入： 380V AC~,50Hz
- 尺寸： 40x30x15cm
- 输入： 1 x 32A CEE 5针输入
- 输出： 6 x 16A CEE 3针输出
- 每路输出带空开
- 铝材外壳
- 带指示灯
- 重量： 3.48KG



特洛斯灯光<sup>®</sup>  
www.tauruslight.com

## EURO POWER BOX

-欧式电源盒



Ordercode: TPB011

### SPECIFICATIONS AND FEATURES:


- Power supply: 230 V AC, 50 Hz
- Size: 50x8.8x7cm
- Weight: 1.56kg
- 1 x 16A 3Pin input
- 6 x European socket output
- Designed for flexible use on stage or rig
- Robust steel profile housing

### 规格和参数:

- 电源输入: 230V AC~, 50Hz
- 尺寸: 50x8.8x7cm
- 输入: 1 x 16A CEE 3针输入
- 输出: 6 x 欧式插座输出
- 铝材外壳
- 输出插座可选万用座
- 重量: 1.56KG

## CEE POWER BOX

-CEE电源盒



Ordercode: TPB012

### SPECIFICATIONS AND FEATURES:

- Power supply: 230 V AC, 50 Hz
- Max. current: 16 A
- Dimensions (L x W x H): 46x12.5x9 cm
- Weight: 2.2kg
- 1 x 16A CEE input
- 5 x 16A CEE output
- Designed for flexible use on stage or rig
- Robust steel profile housing
- With breaker 20A
- With 1M 3x2.5mm Cable

### 规格和参数:

- 电源输入: 230V AC~, 50Hz
- 尺寸: 46x12.5x9cm
- 最大电流: 16A
- 输入: 1 x 16A CEE 3针输入
- 输出: 5 x 16A CEE 3针输出
- 带钩钉位, 方便使用
- 铝材外壳
- 带总开关20A
- 带1M 3x2.5mm电源线
- 重量: 2.2KG

## CEE POWER BOX

-CEE电源盒



Ordercode: TPB013


### SPECIFICATIONS AND FEATURES:

- Power supply: 230 V AC, 50 Hz
- Max. current: 16 A
- Dimensions : 34x7.5x9cm
- Weight: 1.15kg
- 1 x CEE 16A 3P input
- 1 x CEE 16A 3P output
- 4 x European socket output
- Designed for flexible use on stage or rig
- Robust steel profile housing

### 规格和参数:

- 电源输入: 230V AC~, 50Hz
- 尺寸: 34x7.5x9cm
- 最大电流: 16A
- 输入: 1 x CEE 16A输入
- 输出: 1 x CEE 16A输出
- 输出: 4 x 欧式座输出
- 铝材外壳
- 重量: 1.15KG






Ordercode: TPB014

## 32A power split box

### SPECIFICATIONS AND FEATURES:

- Power supply: 380 V AC, 50 Hz
- Max. power: 22080 W
- Max. power/channel: 11040 W
- Max. current/channel: 32 A
- Dimensions (L x W x H): 290 x 150 x 125 mm
- Weight: 1,59 kg
- 1 x 5-pin 32 A CEE input
- 2 x 5-pin 32 A CEE output
- Incl. safety eyelet
- Robust aluminum profile housing
- Output plug (Power): CEE 32A 5-pole (f) 2x
- Power supply: Mains Input Socket (M) CEE 32A 5P

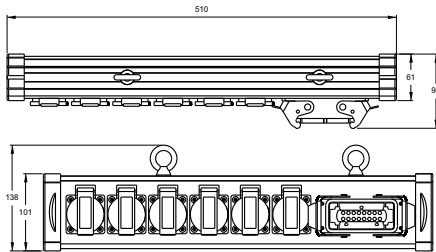


Ordercode: TPB015

## 16P power split box

### SPECIFICATIONS AND FEATURES:

- Power supply: 230 V AC, 50 Hz
- Max. power: 20700 W
- Max. power/channel: 3450 W
- Max. current/channel: 15 A
- Dimensions (L x W x H): 510 x 150 x 95 mm
- Weight: 2 kg
- 1 x 16-pin multi-pin input
- 6 flap safety plugs (1 per channel)
- Incl. safety eyelet
- Robust aluminum profile housing



Ordercode: TPB016

## 16A power split box

### SPECIFICATIONS AND FEATURES:

- Power supply: 380 V AC, 50 Hz
- Max. power: 11040 W
- Max. power/channel: 3680 W
- Max. current/channel: 16 A
- Dimensions (L x W x H): 695 x 150 x 120 mm
- Weight: 3 kg
- 1 x 5-pin 16 A CEE input
- 1 x 5-pin 16 A CEE output
- 6 x 3-pin 16 A CEE output
- Incl. safety eyelet
- Robust aluminum profile housing




## CEE power box 3

-CEE电源盒



Ordercode: TPB017



### SPECIFICATIONS AND FEATURES:

- Power Input: 220V AC 50Hz~
- Size: 22x20x18cm
- 3 x3pin 16A CEE output
- 1 x 3 pin 16A CEE input
- Include safety eyelet
- Max Power: 9600W
- Weight: 1.62 kg
- Robust aluminum profile housing

### 规格和参数:


- 电源输入: 220V AC~,50Hz
- 尺寸: 22x20x18cm
- 输入: 1x 16A CEE3针输入
- 输出: 3 x 16A CEE3针输出
- 铝材外壳
- 带活动安全绳扣
- 最大功率: 9600W
- 重量: 3KG

## CEE power box 6

-CEE电源盒



Ordercode: TPB018



### SPECIFICATIONS AND FEATURES:

- Power Input: 220V AC 50Hz~
- Size: 33x20x18cm
- 1 x3pin 16A CEE input
- 6 x 3 pin 16A CEE output
- Include safety eyelet
- Weight: 2.88 kg
- Robust aluminum profile housing

### 规格和参数:


- 电源输入: 220V AC~,50Hz
- 尺寸: 33x20x18cm
- 输入: 1x 16A CEE3针输入
- 输出: 6 x 16A CEE3针输出
- 铝材外壳
- 带活动安全绳扣
- 重量: 2.88KG

## CEE power box 12

-CEE电源盒



Ordercode: TPB019




### SPECIFICATIONS AND FEATURES:

- Power Input: 380V AC 50Hz~
- Size: 56x20x18cm
- 1 x32A CEE 5P input
- 12 x 3 pin 16A CEE output
- Include safety eyelet
- Weight: 4.85 kg
- Robust aluminum profile housing

### 规格和参数:

- 电源输入: 220V AC~,50Hz
- 尺寸: 56x20x18cm
- 输入: 1x 32A CEE5针输入
- 输出: 12 x 16A CEE3针输出
- 铝材外壳
- 带活动安全绳扣
- 重量: 4.85KG



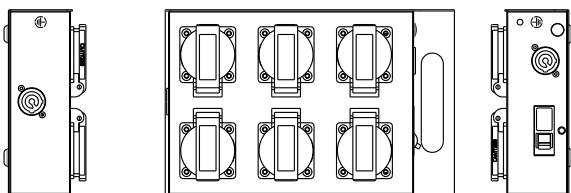

Ordercode: TPB020

## EURO POWER BOX

### -欧式电源盒

#### SPECIFICATIONS AND FEATURES:

- Power supply: 230 V AC, 50 Hz
- Max. power: 3680 W
- Max. current: 16 A
- Dimensions (L x W x H): 262 x 160 x 75 mm
- Weight: 1,4 kg
- 1 x P-Con input, 1 x P-Con bypass
- 6 flap safety plugs
- Designed for flexible use on stage
- Robust steel housing
- Protection fuse: LS C16 A/230 V
- Output plug (Power): P-Con (Power-out) 1x; Safety connector 6x
- Power supply of device: Mains Input Socket (M) P-Con (Power-In)

#### 规格和参数:

- 电源输入: 230V AC~, 50Hz
- 尺寸: 262X160x75mm
- 最大功率: 3680W
- 最大电流: 16A
- 输入: 1 x Powercon输入
- 输出: 6 x 欧式座输出
- 带灯钩位, 方便使用
- 铝材外壳
- 带指示灯
- 保险丝: 16A
- 重量: 1.4KG





Ordercode: TPB021

## socapex power box

-19芯电源盒

### SPECIFICATIONS AND FEATURES:

- Power supply:230 V AC, 50 Hz
- Max. power:20700 W
- Max. power/channel:3450 W
- Max. current/channel:15 A
- Dimensions (L x W x H):510 x 150 x 95 mm
- Weight:2 kg
- 1 x 19-pin Socapex input
- 6 flap safety plugs (1 per channel)
- Incl. safety eyelet
- Robust aluminum profile housing

### 规格和参数:

- 电源输入: 230V AC~,50Hz
- 尺寸: 51x15x9.5cm
- 输入: 1 x 19芯插输入
- 输出: 6 x 欧式插座输出
- 铝材外壳
- 带活动安全绳扣
- 输出插座可选万用座
- 重量: 2KG

## 16P power split box

-欧式电源盒



Ordercode: TPB022

### SPECIFICATIONS AND FEATURES:

- Power supply:230 V AC, 50 Hz
- Max. power:20700 W
- Max. power/channel:3450 W
- Max. current/channel:15 A
- Weight:2 kg
- 1 x 16-pin multi-plug input (32A optional)
- 6 flap safety plugs (1 per channel)
- Incl. safety eyelet
- Robust aluminum profile housing

### 规格和参数:

- 电源输入: 230V AC~,50Hz
- 输入: 1 x 16芯插输入
- 输出: 6 x 欧式插座输出
- 铝材外壳
- 带活动安全绳扣
- 输出插座可选万用座
- 重量: 2KG

## socapex to cee box

-19芯转16A CEE电源盒



Ordercode: TPB023

### SPECIFICATIONS AND FEATURES:

- 1 x 19-pin Socapex input
- Max. power:18000W
- Max. power/channel:3000 W
- Dimensions (L x W x H):56x10.5x15cm
- 1 x 19-pin Socapex output
- 6 x 16A CEE 3P output
- Robust aluminum profile housing
- Size: 55x13.5x13cm
- Weight:3.8 kg

### 规格和参数:

- 电源输入: 230V AC~,50Hz
- 尺寸: 51x10.5x15cm
- 输入: 1 x 19芯插输入
- 输出: 1 x 19芯插输出
- 输出: 6 x CEE16A插座输出
- 铝材外壳
- 带活动安全绳扣
- 重量: 3.8KG







Ordercode: TPB024

## SOCAPEX 1 IN 2 OUT

### SPECIFICATIONS AND FEATURES:

- Socapex Splitter Box
- Male 19pin male socapex input
- 2x19P Socapex Female socket Output
- Size: 18x14.4x6.7cm
- Weight: 1.08KG

### 规格和参数:

- 19芯1分2
- 1个19芯公座输入
- 2个19芯母座输出
- 尺寸: 18x14.4x6.7cm
- 重量: 1.08KG



Ordercode: TPB025

## CEE power box

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 32A, 380V~
- Size: 43x18x13cm
- 6x16A CEE Output(Schuko or other optional)
- Input has LED indicator lights
- Each output has breaker
- With 5x4mm 1.5M Cable
- With handle easy to use
- Ip64 breaker cover
- Weight: 5.5KG

### 规格和参数:

- 电源输入: 5P 32A, 380V~
- 尺寸: 43x18x13cm
- 6x16A CEE输出
- 输入带指示灯
- 每路单独开关控制
- 带5x4mm 1.5米长
- 带提手方便使用
- 重量: 5.5KG



## CEE power box



Ordercode: TPB026

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 63A, 380V~
- 2x32A Output
- Each output has breaker
- Each output has LED Lights
- With handle easy operate

### 规格和参数:

- 电源输入: 5P 63A, 380V~
- 2x32A输出
- 输出带指示灯



Ordercode: TPB027

## 125A power box

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 125A, 380V~
- 2x125A Output
- Each output has main breaker
- Each output has LED Lights
- With handle easy operate

### 规格和参数:

- 电源输入: 5P 125A, 380V~
- 2x125A输出
- 输出带指示灯



Ordercode: TPB028

## Socapex to au box

### SPECIFICATIONS AND FEATURES:

- Power supply:230 V AC, 50 Hz
- Max. current:20 A
- Dimensions :58x10x8cm
- Weight:3 kg
- 1 x Socapex 19pin input
- 1 x Socapex 19pin output
- 12 x Austrian socket output
- Designed for flexible use on stage or rigg
- Robust steel housing

### 规格和参数:

- 电源输入: 230V AC~,50Hz
- 尺寸: 58x10x8cm
- 输入: 1 x Socapex19芯输入
- 输出: 1 x Socapex19芯输出
- 输出: 12 x 澳式座输出
- 带灯钩位, 方便使用
- 铝材外壳
- 带指示灯
- 重量: 3KG



Ordercode: TPB029

## Powercon True1 box

### SPECIFICATIONS AND FEATURES:

- Power supply:230 V AC, 50 Hz
- Max. power/channel:3680 W
- Max. current/channel:16 A
- Dimensions (L x W x H):280 x 90 x 75 mm
- Weight:1 kg
- Input: 1 x CEE 32A 5P
- Output: 1 x CEE 32A 5P
- 6 x Powercon True1 outputs
- Designed for flexible use on stage or rigg
- Truss attachment option (M10 inside thread)
- Robust steel housing
- Output plug (Power): CEE 32A 5P (F) 1x; P-Con True1 6x
- Power supply of device: CEE 32A 5-pol (m) recessed mounting

### 规格和参数:

- 电源输入: 230V AC~,50Hz
- 尺寸: 280x90x75mm
- 最大功率: 3680W
- 最大电流: 16A
- 输入: 1 x CEE 32A 5针
- 输出: 1 x CEE 32A 5针
- 输出: 6 x Powercon TRUE1输出
- 带灯钩位, 方便使用
- 铝材外壳
- 带指示灯
- 重量: 1KG





Ordercode: TPB030

# UK power box

-英式电源盒

## SPECIFICATIONS AND FEATURES:

- Power supply: 220 V AC, 50/60Hz
- Size: 53x21.5x13cm
- Weight: 5.4kg
- 1 x 16A 3Pin input
- 1 x 16A 3Pin output
- 8 x 13A UK socket output
- Designed for flexible use on stage or rig
- Robust steel profile housing
- With handle

## 规格和参数:

- 电源输入: 220V AC~, 50Hz
- 尺寸: 53x21.5x13cm
- 输入: 1 x 16A CEE 3针输入
- 输出: 1 x 16A CEE 3针输入
- 输出: 8 x 13A 英式座输出
- 铝材外壳
- 重量: 5.4KG





Ordercode: TPB031

# CEE power box

## -CEE电源盒

### SPECIFICATIONS AND FEATURES:

- Power supply: 32A 5P 380 V AC, 50 Hz
- Size: 55x13.5x13cm
- Weight: 3.9kg
- 1 x 32A 5Pin input
- 1 x 32A 5Pin output
- 6 x 16A 3Pin socket output
- Designed for flexible use on stage or rig
- Robust steel profile housing

### 规格和参数:

- 电源输入: 32A 5针 380V AC~, 50Hz
- 尺寸: 55x13.5x13cm
- 输入: 1 x 32A CEE 5针输入
- 输出: 1 x 32A CEE 5针输出
- 输出: 6 x 16A CEE输出
- 铝材外壳
- 带指示灯
- 重量: 3.48KG



## CEE POWER BOX



### SPECIFICATIONS AND FEATURES:

- Power supply: 63A 5P 380 V AC, 50 Hz
- 6 x 16A CEE 3Pin output
- 2 x 32A 5Pin output
- 1 x 63A CEE 5Pin input
- With 1M 5x16mm cable
- With RCD main breaker
- Each output with RCD breaker
- Designed for flexible use on stage or rig
- Robust steel profile housing

Ordercode: TPB032

## CEE POWER BOX



### SPECIFICATIONS AND FEATURES:

- Power supply: 32A 5P 380 V AC, 50 Hz
- 6 x 16A CEE 3Pin output
- 1 x 32A CEE 5Pin input
- With 1M 5x6mm cable
- Each output with RCD breaker
- Designed for flexible use on stage or rig
- Robust steel profile housing

Ordercode: TPB033





Ordercode: TPB034

## 4ch hoist controller

### -4路葫芦控制器

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 32A 380V~
- Size: 358x284x168mm
- 4x16A CEE 4pin Output
- Each output 2200W
- Can control 4pcs seperately motors
- Each output has UP/DOWN button
- With emergency stop button
- Weight: 5.6KG

#### 规格和参数:

- 电源输入: 5P 32A, 380V~
- 尺寸: 358x284x168mm
- 4x16A防水CEE4针输出
- 可以独立控制12台电机
- 每路输出最大2200W
- 带紧急停止功能
- 点动升降, 每个控制开关输出都有上/下和关
- 带联机功能
- 重量: 5.6KG



Ordercode: TPB035

## 8ch hoist controller

### -8路葫芦控制器

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 32A 380V~
- Size: 465X360X195MM
- 8x16A CEE 4pin Output
- Each output 2200W
- Can control 12pcs seperately motors
- Each output has UP/DOWN button
- With emergency stop button
- Weight: 10.35KG

#### 规格和参数:

- 电源输入: 5P 32A, 380V~
- 尺寸: 465x360x195mm
- 8x16A防水CEE4针输出
- 可以独立控制12台电机
- 每路输出最大2200W
- 带紧急停止功能
- 点动升降, 每个控制开关输出都有上/下和关
- 带联机功能
- 重量: 10.35KG



Ordercode: TPB036

## 12ch hoist controller

### -12路葫芦控制器

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 32A 380V~
- Size: 465X360X195MM
- 12x16A CEE 4pin Output
- Each output 2200W
- Can control 12pcs seperately motors
- Each output has UP/DOWN button
- With emergency stop button
- Weight: 10.35KG

#### 规格和参数:

- 电源输入: 5P 32A, 380V~
- 尺寸: 465x360x195mm
- 12x16A防水CEE4针输出
- 可以独立控制12台电机
- 每路输出最大2200W
- 带紧急停止功能
- 点动升降, 每个控制开关输出都有上/下和关
- 带联机功能
- 重量: 10.35KG



## 12ch HOIST CONTROLLER



Ordercode: TPB037

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 32A 380V~
- Size:592X422X(220+50) MM
- 12x16A CEE 4pin Output
- 3x 19P socapex output
- Each output 2200W
- Can control 12pcs seperately motors
- Each output has UP/DOWN button
- With emergency stop button
- Weight:14KG



Ordercode: TPB038

## HOIST CONTROLLER

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 63A 380V~
- Size:19U
- 24x16A CEE 4pin Output
- 1x63A CEE Output
- Each output 2200W
- Can control 24pcs seperately motors
- Each output has UP/DOWN button
- With emergency stop button
- Weight:80KG





Ordercode: TPB039

## 24ch hoist controller

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 63A 380V~
- Size:19U
- 24x16A CEE 4pin Output
- 6x 19P socapex output
- 1x32A CEE output
- Each output 2200W
- Can control 24pcs seperately motors
- Each output has UP/DOWN button
- With emergency stop button
- Weight:80KG



Ordercode: TPB040

## 36ch hoist controller

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 63A 380V~
- Size:24U
- 36x16A CEE 4pin Output
- 9x 19P socapex output
- 1x32A CEE output
- Each output 2200W
- Can control 36pcs seperately motors
- Each output has UP/DOWN button
- With emergency stop button
- Weight:110KG







Ordercode: TPB101

## 12ch power rack

### -12路CEE电源箱

#### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 63A 380V~
- Size:6U
- 12x16A CEE 3pin Output
- 2x Multi-socket output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Weight:18.5KG

#### 规格和参数:

- 电源输入: 5P 63A, 380V~
- 尺寸: 6U
- 12x16A防水CEE3针输出
- 2x万用座输出
- 每路输出带指示灯
- 每路单独开关控制
- 电流电压表
- 重量: 18.5KG

## CEE power rack

### -CEE电源箱




Ordercode: TPB102

#### SPECIFICATIONS AND FEATURES:

- Power supply:380-400 V AC, 50 Hz
- Max. output/channel (CEE socket):3680 W
- Max. current/channel (CEE socket):16 A
- Max. output/phase:7360 W
- Max. current/phase:32 A
- Height:3U
- Dimensions (W x D x H):245 x 482 x 132 mm
- Weight:6,6 kg
- Specially designed for larger distribution needs
- 3 U necessary for installation
- 32 A three phase current input via power cable and plug
- The entire distributor is secured via two 30 mA Residual Current Devices (RCD)
- Control lamps indicate each phase
- 4 CEE sockets on the housing back (2 per RCD)
- Each CEE socket features fuse protection via 16 A automatic circuit breakers
- With M6 earthing screw in order to ground a rig if necessary
- Device type of construction: (19") 48,3 cm rack mounting
- Power supply of device: Fix CEE 32A 5-pole (m)

#### 规格和参数:

- 电源输入: 380V~400V AC, 50Hz
- 尺寸: 24.5x48.2x13.2cm
- 最大输出/每路: 3680W
- 带漏电保护
- 输入32A CEE5针
- 机柜式外箱
- 4 x 32A CEE输出
- 1 x 32A CEE输入
- 每路输出单独控制
- 带指示灯
- 重量: 6.6KG

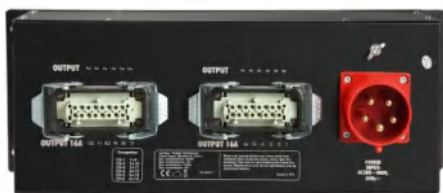

Ordercode: TPB103

## 16pin power rack

### -16芯电源箱

#### SPECIFICATIONS AND FEATURES:

- Power supply:380-400 V AC, 50 Hz
- Max. power output:22080 W
- Max. output/phase:7360 W
- Max. current/phase:32 A
- Max. output/channel (multipin):3680 W
- Max. current/channel (multipin):16 A
- Fuses:12 x 16A 1 Ph, FI/RCD 40A/0.03A
- Dimensions (W x D x H):482 x 210 x 176 mm (4U)
- Weight:6 kg
- 12 x 2-pin fuse breakers (16 A - disconnects neutral wire)
- Specially designed for larger distribution needs
- 32 A three phase current input via 5-pin CEE plug
- 2 x 16-pin multi-connector output
- The entire distributor is secured via 30 mA Residual Current Device (RCD)
- Control lamps indicate each phase

#### 规格和参数:

- 电源输入: 380V-400V AC, 50Hz~
- 尺寸: 48.2x21x17.6cm
- 2x16针输出
- 1x32A CEE 5针输入
- 每路输出带指示灯
- 每路单独开关控制
- 最大功率: 22080W
- 最大输出每路: 7360
- 每路输出单独控制
- 带指示灯
- 重量: 6KG



## CEE POWER RACK

### -CEE电源箱



Ordercode: TPB104

#### SPECIFICATIONS AND FEATURES:

- Power supply: 380-400 V AC, 50 Hz
- Max. output/channel (CEE socket): 3680 W
- Max. current/channel (CEE socket): 16 A
- Max. output/phase: 7360 W
- Max. current/phase: 32 A
- Dimensions (W x D x H): 245 x 482 x 132 mm
- Weight: 6,6 kg
- Specially designed for larger distribution needs
- 3 U necessary for installation
- 32 A three phase current input via power cable and plug
- The entire distributor is secured via two 30 mA Residual Current Devices (RCD)
- Control lamps indicate each phase
- 3 x 32 A CEE output
- 6 x European socket output
- With M6 earthing screw in order to ground a rig if necessary
- Device type of construction: (19") 48,3 cm rack mounting
- Power supply of device: Fix CEE 32A 5-pole (m)

#### 规格和参数:

- 电源输入: 380V~400V AC, 50Hz
- 尺寸: 24.5x48.2x13.2cm
- 最大输出/每路: 3680W
- 带漏电保护
- 输入32A CEE5针
- 机柜式外箱
- 3 x 32A CEE输出
- 6 x 欧式座输出
- 1 x 32A CEE输入
- 每路输出单独控制
- 带指示灯
- 重量: 6.6KG

## CEE POWER RACK

### -CEE电源箱



Ordercode: TPB105

#### SPECIFICATIONS AND FEATURES:

- Power supply: 380-400 V AC, 50 Hz
- Max. power output: 22080 W
- Max. output/phase: 7360 W
- Max. current/phase: 32 A
- Fuses: 12 x 16A 1 Ph, FI/RCD 40A/0.03A
- Dimensions (W x D x H): 482 x 230 x 133 mm (3U)
- Weight: 6,5 kg
- Specially designed for larger distribution needs
- 32 A three phase current input via 5-pin CEE plug
- 2 x 16A output
- 2 x 32A output
- The entire distributor is secured via 30 mA Residual Current Device (RCD)
- Control lamps indicate each phase

#### 规格和参数:

- 电源输入: 380V-400V AC, 50Hz~
- 尺寸: 48.2x23x13.3cm
- 2x16A输出
- 2x32A输出
- 1x32A CEE 5针输入
- 每路输出带指示灯
- 每路单独开关控制
- 最大功率: 22080W
- 最大输出每路: 7360
- 每路输出单独控制
- 重量: 6.5KG

## CEE POWER RACK

### -CEE电源箱



Ordercode: TPB106

#### SPECIFICATIONS AND FEATURES:

- Power supply: 380-400 V AC, 50 Hz
- Max. power: 11040 W
- Max. power/phase: 3680 W
- Max. current/phase: 16 A
- Dimensions (W x D x H): 485 x 210 x 90 mm
- Weight: 2,3 kg
- Designed for mounting in 483 mm racks (19")
- 2U necessary for installation
- 16A three-phase current input and output via mounted plugs
- Control lamps indicate each phase
- 3 safety sockets on the housing front (1 per phase)
- 6 safety sockets on the housing back (2 per phase)
- Output plug (Power): CEE 16A 5-pole (f) 1x; Safety connector 9x

#### 规格和参数:

- 电源输入: 380V~400V AC, 50Hz
- 尺寸: 48.5x21x9cm
- 最大输出/每路: 3680W
- 输出16A CEE5针
- 机柜式外箱
- 1 x 32A CEE输出
- 9 x 欧式座输出
- 1 x 16A CEE输入
- 带指示灯
- 重量: 2.3KG





Ordercode: TPB107

## CEE power box

### -CEE电源盒

#### SPECIFICATIONS AND FEATURES:

- Power supply:380-400 V AC, 50 Hz
- Max. power output:11040 W
- Max. total current:48 A
- Max. output/channel:3680 W
- Max. current/channel:16 A
- Dimensions (W x D x H):270 x 240 x 110 mm
- Weight:4,5 kg
- 6 CEE sockets
- 7.5 m power cord with 5 x 2.5 mm<sup>2</sup> with 16 A CEE-plug
- Output plug (Power): CEE 16A 3-pole (F) 6x
- Power supply of device: Fix fehlt

#### 规格和参数:

- 电源输入：380-400V AC,50Hz~
- 尺寸：27x24x11cm
- 6x16A防水CEE3针输出
- 最大输出：11040W
- 1x 16A CEE 5针输入
- 带5x2.5mm 7.5米长电源线
- 可选配件其它插座输出
- 重量：4.5KG





Ordercode: TPB108

## CEE POWER RACK

-CEE电源盒

### SPECIFICATIONS AND FEATURES:

- Power supply: 380-400 V AC, 50 Hz
- Max. current/channel: 16 A
- 12 x 16A CEE 3P output
- 1 x 32A CEE 5P output
- 1 x 32A CEE 5P Input
- Each output has breaker
- Lightweight and compact size
- Voltage Ammeter

### 规格和参数:

- 电源输入: 380-400V AC, 50Hz~
- 12x16A防水CEE3针输出
- 1x32A CEE5针输出
- 1x32A CEE5针输入
- 每路带空开
- 带电压表

## CEE BOX RACK

-CEE电源箱



Ordercode: TPB109

### SPECIFICATIONS AND FEATURES:

- Power Input: 32A 3P
- Size: 3U
- 6x16A CEE 3pin Output
- 1x 32A CEE 3pin output
- 1x European socket output 16A
- Main breaker 32A
- Voltage Ammeter
- Power indicator
- Aluminum robust housing
- Rack design size
- Net Weight: 5.45KG

### 规格和参数:

- 电源输入: 32A 3针
- 尺寸: 3U
- 6x16A防水CEE3针输出
- 1x 万用座输出
- 1x 32A CEE3针输出
- 总开关32A
- 带电压表
- 铝材外壳
- 可用于机柜
- 重量: 5.45KG



Ordercode: TPB110

## edison power box

-美式电源箱

### SPECIFICATIONS AND FEATURES:

- Power supply: 380-400 V AC, 50 Hz
- Height: 2U
- Designed for larger distribution needs
- 18 x Edison output
- Each output have breaker
- 1 x 32A 3P input
- With main switch
- Voltage Ammeter
- Lightweight and compact case

### 规格和参数:

- 电源输入: 380V~400V AC, 50Hz
- 尺寸: 2U
- 18 x 美式座输出
- 每路带开关
- 32A总开关
- 1 x 32A 3针输入
- 带电压表
- 防震箱子





Ordercode: TPB111

## powercon power box

-POWERCON电源箱

### SPECIFICATIONS AND FEATURES:

- Power supply: 380-400 V AC, 50 Hz
- Height: 2U
- Designed for larger distribution needs
- 18 x POWERCON output
- Each output have breaker
- 1 x 32A 3P input
- With main switch
- Voltage Ammeter
- Lightweight and compact case

### 规格和参数:

- 电源输入: 380V~400V AC, 50Hz
- 尺寸: 2U
- 18 x POWERCON输出
- 每路带开关
- 32A总开关
- 1 x 32A 3针输入
- 带电压表
- 防震箱子

## 63A power rack

-63A电源箱



Ordercode: TPB112

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 63A, 380V~
- Size: 6U
- 6x32A CEE 3pin Output
- 3x16A CEE 3P Output
- Each output has LED indicator lights
- Each output has breaker
- Flightcase color can optional (Black as normal)
- Weight: 28KG

### 规格和参数:

- 电源输入: 5P 63A, 380V~
- 尺寸: 6U
- 3x16A防水CEE3针输出
- 6x32A CEE 3针输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 28KG

## edison power box

-美式电源箱



Ordercode: TPB113

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 32A, 380V~
- Size: 4U
- 18xEdison Output
- Each output has breaker
- With power meter
- Earthproof flightcase
- Weight: 6.5KG

### 规格和参数:

- 电源输入: 5P 32A, 380V~
- 尺寸: 4U
- 18x美式座输出
- 每路单独开关控制
- 电压表
- 防震航空箱
- 重量: 6.5KG

## socapex power box

-SOCAPEX电源箱



Ordercode: TPB114

### SPECIFICATIONS AND FEATURES:

- Power Input: 400A, 380V~
- Size: 6U
- 4xSocapex Output
- 2xEdison output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Double layer earthproof flightcase with mute wheel
- Flightcase with label parts
- Flightcase color can optional (Black as normal)
- Weight: 26KG

### 规格和参数:

- 电源输入: 400A, 380V~
- 尺寸: 6U
- 4xSocapex输出
- 2x美式座输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 双层防震航空箱, 静音轮
- 航空箱带标签页
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 26KG





Ordercode: TPB115

## 12ch power box

-12路直通箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 4P 63A, 380V~
- Size: 4U
- 12x60A Output
- Each output has breaker
- With power meter
- Rack case mount
- Weight: 7KG

### 规格和参数:

- 电源输入: 4P 63A, 380V~
- 尺寸: 4U
- 9x16A输出
- 每路单独开关控制
- 电流表
- 机柜式设计
- 重量: 7KG



Ordercode: TPB116

## Socapex power box

-19芯电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 32A, 380V~
- Size: 3U
- 2 x Socapex Output
- 1x32A CEE 5P output
- Each output has LED indicator lights
- Each output has breaker
- Multi-function power meter
- Weight: 8.5KG

### 规格和参数:

- 电源输入: 32A, 380V~
- 尺寸: 3U
- 2x19芯输出
- 1x32A防水CEE5针输出
- 每路输出带指示灯
- 每路单独开关控制
- 一体电流电压表
- 重量: 8.5KG



Ordercode: TPB117

## 6ch CEE power rack

-6路CEE电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 32A, 380V~
- Size: 2U
- 6x16A CEE 3P Output
- Each output has LED indicator lights
- Each output has breaker
- Weight: 6KG

### 规格和参数:

- 电源输入: 5P 32A, 380V~
- 尺寸: 2U
- 6x16A防水CEE3针输出
- 每路输出带指示灯
- 每路单独开关控制
- 重量: 6KG



Ordercode: TPB118

## 12ch CEE power rack

-12路CEE电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 63A, 380V~
- Size: 4U
- 12x16A CEE 3P Output
- With power meter
- Each output has LED indicator lights
- Each output has breaker
- Weight: 8KG

### 规格和参数:

- 电源输入: 5P 63A, 380V~
- 尺寸: 4U
- 12x16A防水CEE3针输出
- 每路输出带指示灯
- 每路单独开关控制
- 电流表
- 重量: 8KG





Ordercode: TPB119

# SOCAPEX POWER BOX

## -19PIN电源箱

### SPECIFICATIONS AND FEATURES:

- Power Input: 32A 5P, 380V~
- Size: 6U
- 3xSocapex output
- 3xIsraeli socket output
- Each output has breaker
- With RCD protection
- With main breaker
- Flightcase color can optional (Black as normal)
- Weight: 10KG

### 规格和参数:

- 电源输入: 32A 5P, 380V~
- 尺寸: 6U
- 3x19P输出
- 3x以色列座输出
- 每路单独开关控制
- 每路输出带漏保
- 带总开关
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 10KG





## 32A power box

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 32A, 380V~
- Size: 6U
- 11xPowercon Output
- 9x16A CEE 3P Output
- 1x32A CEE output
- Input and output with RCD
- Each output has LED indicator lights
- Each output has breaker
- Flightcase color can optional (Black as normal)
- Weight: 13KG



Ordercode: TPB120

## waterproof power box

### SPECIFICATIONS AND FEATURES:

- Power Input: 5P 32A , 380V~
- 12xPowercon True1 Output
- 1x32A Australia socket Output
- 1x32A CEE output
- Input and output with RCD
- With 1M 5x6mm power cable
- IP rated: IP65
- Each output has breaker
- Weight: 9.2KG



Ordercode: TPB121







Ordercode: TPB122

## power dmx box

-电源盒

### SPECIFICATIONS AND FEATURES:

- For LED par spotlights or other DMX spotlights
- 4xDMX output
- 4xSchuko output
- DMX input and output on the side
- Power twist input on the side
- Dimensions (L x H x D): 121 x 8 x 6 cm
- Colour: Black
- Includes Power Twist cable and 4 M10 mounting screws for spotlight and speaker bracket for easy mounting on a speaker or lighting stand

### 规格和参数:

- 电源输入: Powercon, 220V~
- 尺寸: 121x8x6cm
- 4x欧式座输出
- 4xDMX输出
- DMX输入输出
- Powercon输入输出
- 带支架孔位
- 颜色: 黑色



Ordercode: TPB123

## powercon box

-POWERCON电源盒

### SPECIFICATIONS AND FEATURES:

- Input: 110V~230V
- Size: 1U Rack Size
- 2 x Powercon input
- 8 x Powercon output
- 2 in 8 output
- Max 16A each
- Each input with breaker
- Weight: 2.5KG

### 规格和参数:

- 电源输入: 220V~110V
- 尺寸: 1U机柜尺寸
- 2xPowercon输入
- 8xPowercon 16A输出
- 2进8出
- 每路输入单独控制
- 重量: 2.5KG



Ordercode: TPB124

## powercon true1 box

-POWERCON TRUE1电源盒

### SPECIFICATIONS AND FEATURES:

- Input: 110V~230V
- Size: 1U Rack Size
- 2 x Powercon TRUE1 input
- 8 x Powercon TRUE1 output
- 2 in 8 output
- Max 16A each
- Each input with breaker
- Weight: 2.5KG

### 规格和参数:

- 电源输入: 220V~110V
- 尺寸: 1U机柜尺寸
- 2xPowercon TRUE1输入
- 8xPowercon TRUE1 16A输出
- 2进8出
- 每路输入单独控制
- 重量: 2.5KG



## Other customized samples

All the power box & Power rack can be customized according to your needs.



## MULTI-FUNCTION RACK

### -多功能机柜



Ordercode: TPB140

#### SPECIFICATIONS AND FEATURES:

- Artnet Controller 8 output
- 6xRDM Splitter
- Ethernet switch
- 2xMulti-socket unit 8 output
- With illuminate light
- Size: 10U
- Weight: 38KG

#### 规格和参数:

- 1个8路ARTNET控制器
- 6个RDM信号放大器
- 1个网络交换机
- 2个8路插排
- 带照明灯
- 尺寸: 10U
- 重量: 38KG



Ordercode: TPB141

## NPU SPLITTER RACK

### -NPU信号放大器柜

#### SPECIFICATIONS AND FEATURES:

- Power Input: 220V~
- Size: 14U
- 8xDMX Isolated Splitter 8
- 1xNPU
- 2xMulti-socket box
- With illuminate light
- Flightcase color can optional (Black as normal)
- Weight: 55KG

#### 规格和参数:

- 电源输入: 220V~
- 尺寸: 14U
- 8x8路信号放大器
- 1xNPU
- 2x万用座插排
- 带照明灯
- 一体电流电压表
- 航空箱颜色可选 (默认黑球纹板)
- 重量: 55KG



## 64ch splitter rack

-64路信号放大器柜



Ordercode: DSR64

### SPECIFICATIONS AND FEATURES:

- Power input: 240V 50Hz/60Hz
- Dimensions: 62x70x70cm
- Weight: 32KG
- With 1pcs PDU8
- 8x8, total 64 channel dmx out
- Fully compliant to DMX-512 (1990)
- 3pin & 5pin DMX Input and DMX Thru
- 100% electrical isolation between in/output
- 100% electronic isolation between output/output
- Signal & power LED indicator for each output
- Terminator resistor switch for end of a DMX chain
- Power input via IEC connector on rear panel

### 规格和参数:

- 220V输入
- 尺寸: 10U
- 8x8路光电隔离信号放大器
- 1x8路PDU
- 有效提高DMX信号传输保真能力
- 有效提高DMX信号抗干扰能力
- DMX信号实现光电隔离技术
- 提高调光系统安全性, 稳定性及可靠性。
- 双层防震航空箱
- 带标签页
- 静音轮
- 重量: 35KG

## 32ch splitter rack

-32路信号放大器柜



Ordercode: DSR32

### SPECIFICATIONS AND FEATURES:

- Power input: 220V 50Hz/60Hz
- Dimensions: 6U
- Weight: 24.5KG
- With 1pcs PDU8
- 4x8, total 32 channel dmx out
- Fully compliant to DMX-512 (1990)
- 3pin & 5pin DMX Input and DMX Thru
- 100% electrical isolation between in/output
- 100% electronic isolation between output/output
- Signal & power LED indicator for each output
- Terminator resistor switch for end of a DMX chain
- Power input via IEC connector on rear panel

### 规格和参数:

- 220V输入
- 尺寸: 6U
- 4x8路光电隔离信号放大器
- 1x8路PDU
- 有效提高DMX信号传输保真能力
- 有效提高DMX信号抗干扰能力
- DMX信号实现光电隔离技术
- 提高调光系统安全性, 稳定性及可靠性。
- 双层防震航空箱
- 带标签页
- 静音轮
- 重量: 24.5KG

## 24ch splitter rack

-24路信号放大器柜



Ordercode: DSR24

### SPECIFICATIONS AND FEATURES:

- Power input: 220V 50Hz/60Hz
- Dimensions: 3U
- Weight: 15KG
- 3x8, total 24 channel dmx out
- Fully compliant to DMX-512 (1990)
- 3pin & 5pin DMX Input and DMX Thru
- 100% electrical isolation between in/output
- 100% electronic isolation between output/output
- Signal & power LED indicator for each output

### 规格和参数:

- 220V输入
- 尺寸: 3U
- 3x8路光电隔离信号放大器
- 有效提高DMX信号传输保真能力
- 有效提高DMX信号抗干扰能力
- DMX信号实现光电隔离技术
- 提高调光系统安全性, 稳定性及可靠性。
- 重量: 15KG



# TAURUS<sup>®</sup> LIGHT



Ordercode: PDU8

## power distribution unit 8 -机柜插排

### SPECIFICATIONS AND FEATURES:

- Power Input: 220V~, 50Hz
- Size: 482.5x44x44mm (1U)
- 8 x multi-socket Output
- Power: 2500W
- Plug customized
- Voltage Ammeter
- With Switch
- Input cable: 1.8M
- Aluminium robust housing
- Rack design size

### 规格和参数:

- 电源输入: 220V, 50Hz
- 尺寸: 482.5x44x44mm (1U)
- 8x万用座输出
- 1 x 1.8米电源线
- 输入插头可选, 常规欧式
- 可用于机柜
- 带总开关
- 铝材外壳
- 总功率: 2500W

## POWERCON LEAD

### -蓝白转接头



Ordercode: PL

### SPECIFICATIONS AND FEATURES:

- Adaptor for extension cables
- 3-Pin network connector with phase, neutral and earthing contact
- Replaces cold device connectors in places where a robust solution with a locking mechanism is needed in order to guarantee a secure power connection
- Plug/SocketType: In/out, or In/in, out/out
- Load Capacity (A) 20 A
- IP Rated: IP20


### 规格和参数:

- 最大负载: 20A
- 防水等级: IP20
- 蓝座白座, 或者蓝蓝, 白白
- 3针, 一火, 一地, 二零




特洛斯灯光<sup>®</sup>  
www.tauruslight.com

# TAURUS<sup>®</sup> LIGHT




19-PIN FEMALE SOCKET 19芯母座

Ordercode:19P-FS

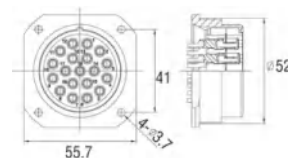


19-PIN MALE SOCKET 19芯公座

Ordercode:19P-MS

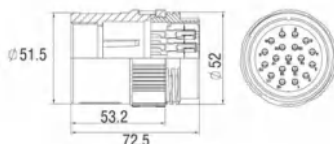

19-PIN MALE PLUG 19芯公插

Ordercode:19P-MP

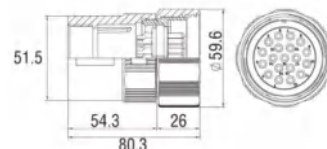

19-PIN FEMALE PLUG 19芯母插

Ordercode:19P-FP

## SOCAPLEX CONNECTORS

**TAURUS** -19芯连接器

### TECHNICAL INFORMATION

- Rated Current: AC 20A 250V
- Operating Limit Voltage: AC 400V
- Insulation Resistance: > 2000M Ohms
- Contact Resistance: < 3M Ohms
- Rated Voltage: AC 1500V
- Terminal Wear: 5000+ connection
- Hipot Test: 1800 VAC / Min.
- Operating Temperature: -40 to 85
- Military grade craftsmanship with precisely -machined fabrication.
- High conductive cooper alloy with 24K gold plated.

### FEATURES:

- Mono-piece body is fabricated of rigid die-casted aluminum alloy, offering alternative choice for weather-oriented applications.
- Watertight (IP67) is achieved with a cable gland (FPG-42) affixed to the cable entry point.
- Compatible with Kupo's PLS and WPS series, as well as Socaplex 419 and Veam VSC connectors.
- Hard gold-plated copper alloy machined contact, ensures the excellent conductivity.
- Non-conductive first grade Bakelite provides great insulation.
- Extended ground contact at female side ensures "mate first, break last" for safety operation.
- Available in solder type only.
- UL / cUL listed.
- Advanced split design for female contact, with greater mating area and less resistance

19-PIN TOOL 19芯工具

Ordercode:19P-TOOL



### FEATURES:

- The practical tool designed for saving the pain of unscrewed-backshell while mating or unmating monopiece connectors.
- Fit to major brand 19 pin monopiece connector.
  - To avoid accidental unscrew of the backshell while coupling or uncoupling.



特洛斯灯光  
www.tauruslight.com



Ordercode: PDC-3



Ordercode: TDC-3

## power & dmx cable

### -电源信号一体线

#### SPECIFICATIONS AND FEATURES:

- Power&DMX Combine cable
- Powercon in/out
- Powercon True1&IP DMX optional
- DMX 3pin XLR in/out (5P optional)
- 3x1.5 or 3x2.5mm Power Cable
- 128WEB 23AWG DMX Cable
- Customize logo
- Add cable tie on the cable
- Length: 1.5M, 2M, 3M, 5M, 10M
- Other length can customized

#### 规格和参数:

- 电源信号一体线
- POWERCON输入输出插头
- DMX3针卡隆头 (5针可选)
- 3x1.5或者3x2.5平方电源线
- 128网信号线
- 可以加印LOGO
- 可带魔术贴
- 长度: 1.5米, 2米, 3米, 5米, 10米
- 其它长度可以定制

Ordercode: EDC-3





Ordercode: SPC-3

## SCHUKO POWER CABLE

-16A CEE电源线

### SPECIFICATIONS AND FEATURES:

- Schuko 16A 3Pin Power cable
- Schuko plug in/out
- 3x1.5 or 3x2.5mm Power Cable
- Customize logo
- Add cable tie on the cable
- Length: 1.5M, 2M, 3M, 5M, 10M
- Other length can customized

### 规格和参数:

- 欧插16A3针电源线
- 欧插16A防水输入输出插头
- 3x1.5或者3x2.5平方电源线
- 可以加印LOGO
- 可带魔术贴
- 长度: 1.5米, 2米, 3米, 5米, 10米
- 其它长度可以定制



Ordercode: PPC-3

## POWERCON POWER CABLE

-POWERCON电源线

### SPECIFICATIONS AND FEATURES:

- Powercon Power cable
- Powercon plug in/out
- 3x1.5 or 3x2.5mm Power Cable
- Customize logo
- Add cable tie on the cable
- Length: 1.5M, 2M, 3M, 5M, 10M
- Other length can customized

### 规格和参数:

- Powercon蓝白头电源线
- POWERCON 20A输入输出插头
- 3x1.5或者3x2.5平方电源线
- 可以加印LOGO
- 可带魔术贴
- 长度: 1.5米, 2米, 3米, 5米, 10米
- 其它长度可以定制



Ordercode: PTPC-3

## POWERCON TRUE1 POWER CABLE

-POWERCON防水电源线

### SPECIFICATIONS AND FEATURES:

- Powercon True1 Power cable
- Powercon True1 plug in/out
- 3x1.5 or 3x2.5mm Power Cable
- Customize logo
- Add cable tie on the cable
- Length: 1.5M, 2M, 3M, 5M, 10M
- Other length can customized

### 规格和参数:

- Powercon防水电源线
- POWERCON 防水输入输出插头
- 3x1.5或者3x2.5平方电源线
- 可以加印LOGO
- 可带魔术贴
- 长度: 1.5米, 2米, 3米, 5米, 10米
- 其它长度可以定制



Ordercode: EPC-3

## EDISON POWER CABLE

-美式电源线

### SPECIFICATIONS AND FEATURES:

- Edison Power cable
- Edison plug in/out
- 3x1.5 or 3x2.5mm Power Cable
- Customize logo
- Add cable tie on the cable
- Length: 1.5M, 2M, 3M, 5M, 10M
- Other length can customized

### 规格和参数:

- 美式电源线
- 美插输入输出插头
- 3x1.5或者3x2.5平方电源线
- 可以加印LOGO
- 可带魔术贴
- 长度: 1.5米, 2米, 3米, 5米, 10米
- 其它长度可以定制







Ordercode:SC192.5-30M

## SOCAPEX CABLE

### -19芯/13芯电源线

#### FEATURES:

- 19pin or 13pin Cable optional
- 2.5mm or 1.5mm Cable optional
- Length: 10M,20M,30M
- Other length can customized
- Can print logo on socapex
- Can print logo on cable
- Can add cable tie

#### 规格和参数:

- 19芯或者13芯电源线
- 2.5平方或者1.5平方米
- 长度: 10米, 20米, 30米
- 其它长度可以定制
- Socapex可以打标
- 线材可以打标
- 可以可魔术贴



Customized any length 长度定制

Ordercode	Specifications	Diameter	Voltage	Weight
SC19-30M	19x2.5mm,30M	19.5±0.5	300/500	25.45KG
SC19-25M	19x2.5mm,25M	19.5±0.5		21.35KG
SC19-20M	19x2.5mm,20M	19.5±0.5		17.25KG
SC19-15M	19x2.5mm,15M	19.5±0.5		13.15KG
SC19-10M	19x2.5mm,10M	19.5±0.5		9.05KG

Ordercode	Specifications	Diameter	Voltage	Weight
SC13-30M	13x2.5mm,30M	19.5±0.5	300/500	21KG
SC13-25M	13x2.5mm,25M	19.5±0.5		18KG
SC13-20M	13x2.5mm,20M	19.5±0.5		15KG
SC13-15M	13x2.5mm,15M	19.5±0.5		10KG
SC13-10M	13x2.5mm,10M	19.5±0.5		7KG



# TAURUS<sup>®</sup> LIGHT



Ordercode: BO-1.5

## break out cable -19芯散尾

### SPECIFICATIONS AND FEATURES:

- Socapex to Powercon cable
- 1 x Socapex 19pin male plug
- 6 x Powercon(Edison, IEC, UK 13A,etc)
- 3x1.5 or 3x2.5mm Power Cable
- Customize logo
- Add cable tie on the cable
- Length: 0.5M, 1M, 1.5M, 2M, 3M
- Other length can customized

### 规格和参数:

- 19芯散尾线
- 1 x 19芯公插头
- 6 x Powercon电源头(其它输出可选)
- 3x1.5或者3x2.5平方电源线
- 可以加印LOGO
- 可带魔术贴
- 长度: 0.5米, 1米, 1.5米, 2米, 3米
- 其它长度可以定制



特洛斯灯光<sup>®</sup>  
www.tauruslight.com



Ordercode: CPC-16A

## 16A CEE power cable

### -16A CEE电源线

#### SPECIFICATIONS AND FEATURES:

- CEE 16A 3Pin Power cable
- CEE plug in/out
- 3x2.5mm Power Cable
- Customize logo
- Add cable tie on the cable
- Length: 1.5M, 2M, 3M, 5M, 10M
- Other length can customized

#### 规格和参数:

- CEE16A3针电源线
- CEE16A防水输入输出插头
- 3x2.5平方电源线
- 可以加印LOGO
- 可带魔术贴
- 长度: 1.5米, 2米, 3米, 5米, 10米
- 其它长度可以定制



Ordercode: CPC-32A

## 32A CEE power cable

### -32A CEE电源线

#### SPECIFICATIONS AND FEATURES:

- 32A Power extension cable
- 32A CEE 5pin plug in/out
- 5x6mm Power Cable
- Customize logo
- Add cable tie on the cable
- Length: 1.5M, 2M, 3M, 5M, 10M
- Other length can customized

#### 规格和参数:

- 32A电源线
- 32A输入输出插头
- 5x6平方电源线
- 可以加印LOGO
- 可带魔术贴
- 长度: 3米, 5米, 10米
- 其它长度可以定制



Ordercode: CPC-63A

## 63A CEE power cable

### -63A电源线

#### SPECIFICATIONS AND FEATURES:

- 63A Power extension cable
- 63A CEE 5pin plug in/out
- 5x16mm Power Cable
- Customize logo
- Add cable tie on the cable
- Length: 1.5M, 2M, 3M, 5M, 10M
- Other length can customized

#### 规格和参数:

- 63A电源线
- 63A CEE5针输入输出插头
- 5x16平方电源线
- 可以加印LOGO
- 可带魔术贴
- 长度: 1.5米, 2米, 3米, 5米, 10米
- 其它长度可以定制



Ordercode: CPC-125A

## 125A CEE extension cable

### -125A电源线

#### SPECIFICATIONS AND FEATURES:

- 125A Power extension cable
- 125A CEE 5pin male/female
- 4x35mm+1x16mm Power Cable
- Customize logo
- Add cable tie on the cable
- Length: 3M, 5M, 10M
- Other length can customized

#### 规格和参数:

- 63A电源线
- 63A CEE5针输入输出插头
- 5x35平方电源线
- 可以加印LOGO
- 可带魔术贴
- 长度: 3米, 5米, 10米
- 其它长度可以定制



## CEE 16A 1 IN 4 OUT CABLE

-1分四CEE电源线



Ordercode: C16P4

### SPECIFICATIONS AND FEATURES:

- 1to4 CEE 16A 3Pin Power cable
- 1 x CEE plug in male 16A
- 4 x CEE plug out female 16A
- 3x2.5mm Power Cable
- Customize logo
- Add cable tie on the cable
- Length: 0.3M, 0.5M, 1M, 1.5M, 2M
- Other length can customized

### 规格和参数:

- 1分四电源线
- 1 x CEE16A 3针公插输入
- 4 x CEE16A 3针母插输出
- 3x2.5平方电源线
- 可以加印LOGO
- 可带魔术贴
- 长度: 0.3米, 0.5米, 1米, 1.5米, 2米
- 其它长度可以定制

## POWERCON 1 IN 4 OUT CABLE

-1分四Powercon电源线



Ordercode: TPT4



Ordercode: TPTTP4



## CUSTOMIZED CABLE

-定制电源线



1 Shuko in 3 Schuko out cable

Ordercode:1I3SO



30A to 3 Schuko plug Cable

Ordercode:30ASC



32A CEE 5P to 3 CEE 16A Cable

Ordercode:32AS16



SOCAPEX TO 16A 4P CABLE

Ordercode:ST16A4



CEE 16A Y CABLE

Ordercode:C16-Y




US PLUG 1 in 2 out Cable

Ordercode:US-Y



32A AU EXTENSION CABLE

Ordercode:32AEC

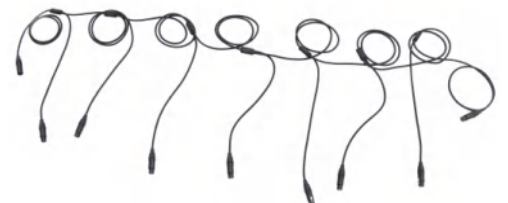

DMX 1 in 8 out Cable

Ordercode:DC8O



## CUSTOMIZED CABLE

-定制电源线



16A 4P Extension Cable

Ordercode:16A4-3



400A Split Cable

Ordercode:400S-2



Australia Extension Cable

Ordercode:AEC-2



Powercon True1 to Schuko

Ordercode:PS



3pin Extension Cable

Ordercode:3EC



63A Pigtails Cable

Ordercode:63A-PC



AUDIO CABLE

Ordercode:AC-1



AUDIO CABLE

Ordercode:AC-2



16PIN Extension Cable

Ordercode:16PC



Socapex 7-Pin Motor Control Cable

Ordercode:SC7P



## POWERCON CONNECTORS

### -电源信号连接器

#### Water Proof PowerConnector防水电源插头插座



Ordercode:Powercon T-FP



Ordercode:PowerconT-MS




Ordercode:PowerconT-MP



Ordercode:PowerconT-FS

- 该系列产品为全新设计的新一代POWERCONNECTOR连接器，被广泛应用于户外条件下的电连接，防护等级为IP65
- 可锁定三芯设备（AC）接插件，具有接点
- 高电流容量，额定为16A/250V AC
- UL498标准认证编码：E356932
- 通过VDE 认证( 认证号：40044166)
- New design lockable 3 pin equipment(AC)connector with contacts for line, neutral and preating safety ground
- Use for outdoor,can be achieve Ip65
- High current capacity, rated at 16A/250V AC
- Fast and easy locking system
- Extremely robust and reliable
- UL recognized components (file NO.:E356932)
- VDE recognized components (file No.40044166)

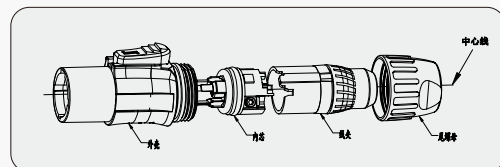

Ordercode:Powercon-BP



Ordercode:Powercon-WP



Ordercode:Powercon-BS



Ordercode:Powercon-WS

- 3芯20 A / 250 V ac 设备电源连接器（拥有火线，零线及预接地线端子）
- 卡盘式夹线套，适用于直径6 mm到15 mm的电缆线
- UL认证原件
- 100%兼容powerCON®- 获得NEUTRIK®认可



- 3芯20 A / 250 V ac 设备电源连接器（拥有火线，零线及预接地线端子）
- 采用增强的玻璃纤维材料，十分耐用
- 牢固的扭锁系统，配合人体工学设计快速锁
- 100%兼容powerCON®- 获得NEUTRIK®认可





## CEE CONNECTORS

### -CEE防水插头

产品型号 Ordercode	产品名称 Product Name	最大承载 Max Load	环境温度 Work Temp	材料 Materials	图片 Pictures
C16-3P	16A CEE 3pin	18.2	-30 ~ +80	SEBS Cover, Rubber SEBS盖板+橡胶底座材质	
C32-5P	32A CEE 5pin	16			
C63-5P	63A CEE 5pin	9.9			
C125-5P	125A CEE 5pin	9.9			

电流 Current	极数 Poles	110V 50a.60Hz	230V 50a.60Hz	400V 50a.60Hz	400-440V	500V 50a.60Hz	>50-500V 100-300Hz	>50-500V a.300-500Hz	包装单位 packing unit	重量 Weight
		3极4极5极 4时h 4时h 4时h	3极4极5极 6时h 9时h 9时h	3极4极5极 9时h 6时h 6时h	4极 3时h	3极4极5极 7时h 7时h 7时h	3极4极5极 10时h 10时h 10时h	3极4极5极 2时h 2时h 2时h	件数 Pcs	克/件 g/Pc

#### 参数Parameter


尺寸(毫米) size(mm)	16			16			32			32			63			63				
	安培 Amp	极数 Poles	极数 Poles	安培 Amp	极数 Poles	极数 Poles	安培 Amp	极数 Poles	极数 Poles	安培 Amp	极数 Poles	极数 Poles	安培 Amp	极数 Poles	极数 Poles	安培 Amp	极数 Poles	极数 Poles		
a	128	132.5	139.5	导线横截面积(平方毫米)从最小至最大 Conductor crosssectional area (mm <sup>2</sup> )Min. To Max			a	162	162	162	导线横截面积(平方毫米)从最小至最大 Conductor crosssectional area (mm <sup>2</sup> )Min. To Max			a	215.5	215.5	215.5	导线横截面积(平方毫米)从最小至最大 Conductor crosssectional area (mm <sup>2</sup> )Min. To Max		
b	95	99.5	106.5	1.5-2.5			b	125	125	125	4-6			b	160.5	160.5	160.5	10-16		
c	40	40	40	1.5-2.5			c	48.5	48.5	48.5	4-6			c	87.3	87.3	87.3	10-16		
d	59.2	66.3	76.3	1.5-2.5			d	81	81	89.5	4-6			d	96.7	96.7	96.7	10-16		
e	39	44	50	1.5-2.5			e	50.5	50.5	56.5	4-6			e	63	63	63	10-16		
f	17.5	21.6	26.6	1.5-2.5			f	25	25	30	4-6			f	36.5	36.5	36.5	10-16		
g	47	53.5	62	1.5-2.5			g	63	63	69.5	4-6			g	75.3	75.3	75.3	10-16		





## DMX CABLE & CONNECTORS

-DMX信号线

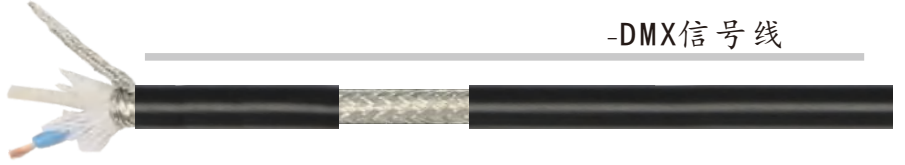

规格 GAUGE	MM <sup>2</sup>	导体结构 Core Structure	颜色代码 Colour Coding	直径 (OD)
128WEB 23AWG DMX Cable	0.3	(0.1x38)x2+0.10x128	A-S	6.5
126WEB 23AWG DMX Cable	0.3	(0.1x35)x2+0.010x80	A-S	6.0

- 全新的按钮设计，操作更平滑
- 金属外壳使用内螺纹设计，确保其在任何使用现场情况下承受重力压迫
- 新的接地（底盘和电缆接插件之间良好的完整接触）
- 三芯(五芯)卡侬母头，外壳镀镍，接触点镀锡钨合金
- 线径范围4-8mm

- New design for the key, easy operate
- Metal housing with inner thread increases retention force and makes assembly easier and faster
- New ground contact – excellent contact integrity between chassis and cable connector;
- 3 pin(5 pin) female connector, housing with Nickel plated and silver contact
- OD:4-8MM



DMX SOCKET  
Ordercode: DC-3PIN

DMX SOCKET  
Ordercode: DC-5PIN

DMX SOCKET  
Ordercode: DC-3PIN

DMX SOCKET  
Ordercode: DC-5PIN



### Customized cable marking

With TAURUS LIGHT you have the option of customized cable marking - your own text printed on the cable. For example Company name + Length



## waterproof dmx cable

-防水DMX信号线



Ordercode: IP-DC

### SPECIFICATIONS AND FEATURES:

- 128WEB 23AWG DMX Cable
- Seetronic 3pin DMX in/out
- 5pin DMX Connector optional
- Customize logo
- Add cable tie on the cable
- Length: 1.5M, 2M, 3M, 5M, 10M
- Other length can customized

### 规格和参数:

- 128网信号线
- SEETRONIC防水DMX卡龙头
- 5针可选
- 可以加印LOGO
- 可带魔术贴
- 长度: 1.5米, 2米, 3米
- 其它长度可以定制



Ordercode: DC-3

## dmx cable

-信号线

### SPECIFICATIONS AND FEATURES:

- DMX Web cable
- Powercon in/out
- DMX 3pin XLR in/out (5P optional)
- 128WEB 23AWG DMX Cable
- Customize logo
- Cable and Connector can choose color
- Add cable tie on the cable
- Length: 1.5M, 2M, 3M, 5M, 10M
- Other length can customized

### 规格和参数:

- 编织网信号线
- DMX3针卡隆头 (5针可选)
- 128网信号线
- 可以加印LOGO
- 信号线和XLR头可选颜色
- 可带魔术贴
- 长度: 1.5米, 2米, 3米
- 其它长度可以定制

## dmx snake cable

-DMX信号线



Ordercode: DSC-8

### SPECIFICATIONS AND FEATURES:

- DMX Snake Cable
- Customize logo
- Add cable tie on the cable
- 4 line, 6 line, 8 line, 12 line  
othe can customized
- Other length can customized

### 规格和参数:

- DMX线8进8出
- 4路, 8路, 12路或者其它
- 可以加印LOGO
- 可带魔术贴
- 长度可以定制





Ordercode: 400EE-3M

## 400A POWERLOCK EXTENSION CABLE

-400A欧式延长线

### SPECIFICATIONS AND FEATURES:

- Powerlock Power Extend Cable
- L1,L2,L3,N,G - 5P optional
- 120mm Power Cable(50,70,95mm)
- Customize logo
- Add cable tie on the cable
- Length: 1.5M, 5M, 10M
- Other length can customized

### 规格和参数:

- 400A欧式延长线
- 三火一零一地, 5线
- 120平方电源线
- 可以加印LOGO
- 可带魔术贴
- 长度: 1.5米, 2米, 3米
- 其它长度可以定制

## 400A POWERLOCK POWER CABLE

-400A电源线



Ordercode: 400A-EC

### SPECIFICATIONS AND FEATURES:

- Powerlock Power Cable
- 120mm Power Cable
- Customize logo
- Add cable tie on the cable
- Length: 1.5M, 2M, 3M, 5M, 10M
- Other length can customized

### 规格和参数:

- 400A欧式线耳
- 120平方电源线
- 可以加印LOGO
- 可带魔术贴
- 长度: 1.5米, 2米, 3米
- 其它长度可以定制

## 400A CAMLOCK POWER CABLE

-400A美式电源线



Ordercode: 400A-UC

### SPECIFICATIONS AND FEATURES:

- Camlock Power Extend Cable
- 120mm Power Cable
- Customize logo
- Add cable tie on the cable
- Length: 1.5M, 2M, 3M, 5M, 10M
- Other length can customized

### 规格和参数:

- 400A美式延长线
- 120平方电源线
- 可以加印LOGO
- 可带魔术贴
- 长度: 1.5米, 2米, 3米
- 其它长度可以定制



## 400A POWERLOCK

-400A欧式连接器

### 400A PLUG MALE 400A公插



Ordercode:E400A-MPBR



Ordercode:E400A-MPB



Ordercode:E400A-MPGR



Ordercode:E400A-MPG



Ordercode:E400A-MPBL

### 400A PLUG FEMALE 400A母插



Ordercode:E400A-FPBR



Ordercode:E400A-FPB



Ordercode:E400A-FPGR



Ordercode:E400A-FPG



Ordercode:E400A-FPBL

### 400A SOCKET MALE 400A公座



Ordercode:E400A-MSB



Ordercode:E400A-MSG



Ordercode:E400A-MSW



Ordercode:E400A-MSR



Ordercode:E400A-MSBL

### 400A SOCKET FEMALE 400A母座



Ordercode:E400A-FSB



Ordercode:E400A-FSG



Ordercode:E400A-FSW



Ordercode:E400A-FSBR



Ordercode:E400A-FSBL

### TECHNICAL INFORMATION

- With a female contact, mating with Line Source or Panel Source.
- Innovative patent key-release pin for easy uncoupling without additional tool.
- Longer POM cotter pin is equipped
- Never reuse cotter pin; reusing cotter pin might expose the operation to electrical danger.

### FEATURES:

- Ergonomic hand grip assists easier handling.
- Color coded and mechanically keyed to prevent mating errors.
- Contacts fitted with a plastic end cap to prevent accidental touching of live parts.
- IP 2X finger protection against electric shock.
- M40 cable gland is supplied with two rubber bushings, 18mm (I.D.) and 26mm (I.D.), for gripping cables up to 19-28mm diameter.
- R120 Reduction Sleeve, 16.50mm (I.D.) x 32mm(L), is included as standard for cable diameter 120mmsq; other size of sleeve is available upon request.



## 400A CAMLOCK

-400A美式连接器

### 400A PLUG MALE 400A公插



Ordercode:U400A-MPB



Ordercode:U400A-MPG



Ordercode:U400A-MPW



Ordercode:U400A-MPR



Ordercode:U400A-MPBL

### 400A PLUG FEMALE 400A母插



Ordercode:U400A-FPB



Ordercode:U400A-FPG



Ordercode:U400A-FPW



Ordercode:U400A-FPR



Ordercode:U400A-FPBL

### 400A SOCKET MALE 400A公座



Ordercode:U400A-MSB



Ordercode:U400A-MSG



Ordercode:U400A-MSW



Ordercode:U400A-MSR



Ordercode:U400A-MSBL

### 400A SOCKET FEMALE 400A母座



Ordercode:U400A-FSB



Ordercode:U400A-FSG



Ordercode:U400A-FSW



Ordercode:U400A-FSBR



Ordercode:U400A-FSBL

### TECHNICAL INFORMATION

Voltage Rating: 600V Maximum  
 Amperage Rating: 400A Maximum  
 Base Compound: Santoprene 105 °C rated  
 Contact Material: Brass  
 Terminal Accommodation: #6, #4, #2, 2/0, 4/0 POM  
 (Longer set screw required for #6 & #4)  
 Retaining Pin Material: POM

### FEATURES:

1. Non-metallic retaining pin provides superior durability and insulation.
2. Arrow point provides clear identification.
3. Easily identifiable line for cable cut-off.
4. Ribbed body for slip-free grip.
5. Robust insulation sleeve adds heat-resistance and strength to the connector.
6. High-conductive brass contact.



## POWER PANEL SERIES

-电源U板系列



**CEE 16A 2U Panel**

Ordercode: CP-16A6



**Socapex 2U Panel**

Ordercode: SP-19P3



**Socapex 3U Panel**

Ordercode: SP-19P4



**400A US Power Panel**

Ordercode: 400P-US



**400A Euro Power Panel**

Ordercode: 400P-EURO



**CEE 32A 3U Panel**

Ordercode: CP-32A2





Ordercode: FC100

## Fibre-optical 100M

-光纤

### SPECIFICATIONS AND FEATURES:

- Fibre-optical cable
- Length: 100M, 200M, 300M, 400M, 500M
- Multi-load: 4 line (2, 6 or 8 core optional)
- Color:Black
- Can customized the length
- Single Mode or Multi-Mode
- LC connectors
- OM1,OM2,OM3
- With protection metal cap

### 规格和参数:

- 长度：100~500米
- 多芯：4路
- 颜色：黑色
- 可以定制长度





Ordercode: CAT6-8C80M

## 8 CORE 80M CABLE

### -8芯80米网线

#### SPECIFICATIONS AND FEATURES:

- Rj45 cable
- Length: 80M
- Multi-load: 8 line
- Color:Black
- Can customized the length
- Packing Size: 67x47x67CM

#### 规格和参数:

- 长度: 80米
- 多芯: 8路
- 颜色: 黑色
- 可以定制长度
- 包装尺寸: 67x47x67cm



Ordercode: CAT6-80M

## 80M CAT6 CABLE

### -80米网线

#### SPECIFICATIONS AND FEATURES:

- CAT6 cable
- Length: 80M(Other customized)
- Flightcase (optional)
- Color:Black
- Can customized the length
- Packing Size: 67x47x67CM

#### 规格和参数:

- 长度: 80米 (可定制)
- 航空箱 (定制)
- 颜色: 黑色
- 可以定制长度
- 包装尺寸: 67x47x67cm





# TAURUS<sup>®</sup> LIGHT



Ordercode: CP-2L



Flightcase optional 5in1  
航空箱选配5装1  
Size: 100x32x46cm



Ordercode: CP-3L



Ordercode: CP-4L



Ordercode: CP-5L

## cable protector 2 LINE -2线槽

### SPECIFICATIONS AND FEATURES:

- Dimensions (L x W x H): 100x25x5cm
- Weight: 6.45 kg
- Number of cable ways: 2
- Color: Black/yellow
- Maximum load: 40T
- For protecting your cables during events
- Signal colors (black/orange) for improved visibility
- Reflection strips in both directions
- Cable crossovers can easily be connected with each other
- For 2 cable ways (width approx. 30 mm/22mm height)
- Made of heavy rubber for maximum stability
- Materials: SEBS Cover, Rubber

### 规格和参数:

- 尺寸: 100x25x5cm
- 自重: 6KG
- 最大承载(T): 40T
- 环境温度 (°C): -30 ~ +75
- 击穿电压 (V): 5000
- 颜色: 黄黑
- 线槽数量: 2
- 材质: SEBS盖板+橡胶底座材质
- 航空箱尺寸: 110x34x49cm
- 毛重: 46.6KG

## cable protector 3 LINE -3线槽

### SPECIFICATIONS AND FEATURES:

- Dimensions (L x W x H): 100x35x5cm
- Weight: 10.25 kg
- Number of cable ways: 3
- Color: Black/yellow
- Maximum load: 40T
- For protecting your cables during events
- Signal colors (black/orange) for improved visibility
- Reflection strips in both directions
- Cable crossovers can easily be connected with each other
- For 3 cable ways (width approx. 30 mm/22mm height)
- Made of heavy rubber for maximum stability
- Materials: SEBS Cover, Rubber

### 规格和参数:

- 尺寸: 100x35x5cm
- 自重: 10.25KG
- 最大承载(T): 40T
- 环境温度 (°C): -30 ~ +75
- 击穿电压 (V): 5000
- 颜色: 黄黑
- 线槽数量: 3
- 材质: SEBS盖板+橡胶底座材质
- 航空箱尺寸: 110x42x48cm

## cable protector 4 LINE -4线槽

### SPECIFICATIONS AND FEATURES:

- Dimensions (L x W x H): 80x50x6cm
- Weight: 16 kg
- Number of cable ways: 4
- Color: Black/yellow
- Maximum load: 40T
- For protecting your cables during events
- Signal colors (black/orange) for improved visibility
- Reflection strips in both directions
- Cable crossovers can easily be connected with each other
- For 4 cable ways (width approx. 30 mm/22mm height)
- Made of heavy rubber for maximum stability
- Materials: SEBS Cover, Rubber

### 规格和参数:

- 尺寸: 80x50x6cm
- 自重: 16KG
- 最大承载(T): 40T
- 环境温度 (°C): -30 ~ +75
- 击穿电压 (V): 5000
- 颜色: 黄黑
- 线槽数量: 4
- 材质: SEBS盖板+橡胶底座材质
- 航空箱尺寸: 97x58x55cm

## cable protector 5 LINE -5线槽

### SPECIFICATIONS AND FEATURES:

- Dimensions (L x W x H): 80x50x5cm
- Weight: 12.5 kg
- Number of cable ways: 5
- Color: Black/yellow
- Maximum load: 40T
- For protecting your cables during events
- Signal colors (black/orange) for improved visibility
- Reflection strips in both directions
- Cable crossovers can easily be connected with each other
- For 5 cable ways (width approx. 30 mm/22mm height)
- Made of heavy rubber for maximum stability
- Materials: SEBS Cover, Rubber

### 规格和参数:

- 尺寸: 80x50x5cm
- 内尺寸: 30x30x5
- 自重: 11.34KG
- 最大承载(T): 5000
- 环境温度 (°C): -30 ~ +75
- 击穿电压 (V): 5000
- 颜色: 黄黑
- 线槽数量: 5
- 材质: SEBS盖板+橡胶底座材质
- 航空箱尺寸: 94x57x59cm



# TAURUS<sup>®</sup> LIGHT



Ordercode: VCT01



Ordercode: VCT02



Ordercode: VCT03



Ordercode: VCT04

## CABLE TIE

### -魔术贴

#### SPECIFICATIONS AND FEATURES:

- VCT01: LENGTH 30CM, WIDTH 2CM
- VCT02: LENGTH 46CM, WIDTH 2CM (3x2.5mm Cable)
- VCT03: LENGTH 25CM, WIDTH 2CM (For DMX Cable)
- VCT04: LENGTH 60CM, WIDTH 5CM (Good for 19x2.5 mm cable)
- Any other specification can customized

#### 规格和参数:

- VCT01:长30cm 宽: 2cm
- VCT02: 长46cm 宽: 2cm
- VCT03: 长 25cm 宽: 2cm
- VCT04: 长60cm 款: 5cm
- 其它尺寸可以定制
- 高档材料, 耐用结实



Ordercode: Plastic Seals



特洛斯灯光<sup>®</sup>  
www.tauruslight.com

## CLAMPS & SAFETY CHAIN

-灯钩&安全绳



Safe working load (swl:250kg)  
For diameter 42-52mm,  
Unit weight: 0.35kg



Safe working load (swl:250kg)  
For diameter 42-52mm,  
Unit weight: 0.65kg



Safe working load (swl:250kg)  
For diameter 50-52mm,  
Unit weight: 0.45kg



Safe working load (swl:250kg)  
For diameter 35-58mm,  
Unit weight: 0.48kg



Safe working load (swl:100kg)  
For diameter 48-51mm,  
Unit weight: 0.18kg



Safe working load (swl:100kg)  
For diameter 48-51mm,  
Unit weight: 0.18kg



## FLIGHTCASE CUSTOMIZED

-航空箱定制





**notes**

备注

---





**Taurus Light Co., Limited**  
特洛斯灯光有限公司

Add: Tieshanhe Road, Sandong Avenue, Huadu District, Guangzhou City, China

地址：广东省广州市花都区三东大道东铁山河路

Tel: +86 20 29838986 Fax: +86 20 29838986 Whatsapp/Wechat: +86 13431355250

电话：+86 20 29838986 移动电话：13431355250

Wechat: TAURUS\_JONNY QQ:2596222621 Jonny Wang

Email: export@tauruslight.com Website: www.tauruslight.com

邮箱： export@tauruslight.com 网站: www.tauruslight.com